

USER MANUAL

C66 VoIP Phone



Corporate Headquarters

Fanvil Technology Co., Ltd

Address: Level 3, Block A, Gaoxinqi Building, Anhua Industrial Park,
Qianjin 1 Road, 35th District, Bao'An, Shenzhen 518101 P.R.China.

Web Site: [www. Fanvil.com](http://www.Fanvil.com)

Tel: +86 755 26402199

Fax: +86 755 26402618



Safety Notices

Please read the following safety notices before installing or using this phone. They are crucial for the safe and reliable operation of the device.

- Please use the external power supply that is included in the package. Other powers supplies may cause damage to the phone, affect its performance or induce noise.
- Before using the external power supply in the package, please check with home power voltage. Inaccurate power voltage may cause fire and damage.
- Please do not damage the power cord. If power cord or plug is impaired, do not use it, it may cause fire or electric shock.
- The plug-socket combination must be accessible at all times because it serves as the main disconnecting device.
- Do not drop, knock or shake it. Rough handling can break internal circuit boards.
- Do not install the device in places where there is direct sunlight. Also do not put the device on carpets or cushions. It may cause fire or breakdown.
- Avoid exposure the phone to high temperature, below 0°C or high humidity.

Avoid wetting the unit with any liquid.

- Do not attempt to open it. Non-expert handling of the device could damage it. Consult your authorized dealer for help, or else it may cause fire, electric shock and breakdown.
- Do not use harsh chemicals, cleaning solvents, or strong detergents to clean it. Wipe it with a soft cloth that has been slightly dampened in a mild soap and water solution.
- When lightning, do not touch power plug or phone line, it may cause an electric shock.
- Do not install this phone in an ill-ventilated place.
- You are in a situation that could cause bodily injury. Before you work on any equipment, be aware of the hazards involved with electrical circuitry and be familiar with standard practices for preventing accidents.

Table of Content

INTRODUCING C66 VOIP PHONE	6
1.1 THANK YOU FOR YOUR PURCHASING C66.....	6
1.2 DELIVERY CONTENT.....	6
1.3 KEYPAD.....	7
1.4 PORT FOR CONNECTING	8
1.5 ICON INTRODUCTION	9
1.6 LED INTRODUCTION.....	9
2 INITIAL CONNECTING AND SETTING.....	11
2.1 CONNECT THE PHONE	11
2.1.1 Connect to network.....	11
2.1.2 Power adaptor connection	12
2.2 BASIC INITIALIZATION	12
2.2.1 Network settings.....	12
3 C66'S BASIC FUNCTION	14
3.1 MAKING A CALL	14
3.1.1 Call Device.....	14
3.1.2 Call Methods	14
3.2 ANSWERING A CALL	14
3.3 DND	15
3.4 CALL FORWARD	15
3.5 CALL HOLD.....	15
3.6 CALL WAITING	15
3.7 MUTE	16
3.8 CALL TRANSFER	16
3.9 3-WAY CONFERENCE CALL	16
3.10 MULTIPLE-LINE	16
4 C66'S ADVANCED FUNCTION.....	18
4.1 CALL PICKUP.....	18
4.2 JOIN CALL	18
4.3 REDIAL / UNREDIAL	18
4.4 CLICK TO DIAL	19
4.5 CALL BACK	19
4.6 AUTO ANSWER	19
4.7 HOTLINE	19
4.8 APPLICATION	19
4.8.1 SMS	19
4.8.2 Memo.....	20
4.8.3 Voice Mail	20
4.9 PING	20

4.10	PROGRAMMABLE KEY CONFIGURATION	20
5	C66'S OTHER FUNCTIONS.....	24
5.1	AUTO HANDDOWN	24
5.2	BAN ANONYMOUS CALL.....	24
5.3	BAN OUTGOING	24
5.4	DIAL PLAN.....	24
5.5	DIAL PEER	24
5.6	AUTO REDIAL	25
5.7	CALL COMPLETION	25
5.8	RING FROM HEADSET	25
5.9	POWER LIGHT	25
5.10	HIDE DTMF.....	25
5.11	PASSWORD DIAL.....	26
5.12	PRE DIAL	26
5.13	ACTION URL & ACTIVE URI	26
5.14	PUSH XML	26
6	C66'S BASIC SETTING	27
6.1	KEYBOARD	27
6.2	SCREEN SET	27
6.3	RINGER SET	27
6.4	VOICE VOLUME.....	27
6.5	TIME & DATE.....	27
6.6	GREETING WORD	28
6.7	LANGUAGE SET.....	28
7	C66'S ADVANCED SETTINGS	29
7.1	ACCOUNT	29
7.2	NETWORK.....	29
7.3	SECURITY	29
7.4	MAINTENANCE.....	29
7.5	FACTORY RESET	29
8	WEB CONFIGURATION.....	30
8.1	INTRODUCTION OF CONFIGURATION	30
8.1.1	Ways to configure.....	30
8.1.2	Password Configuration.....	30
8.2	SETTING VIA WEB BROWSER.....	30
8.3	CONFIGURATION VIA WEB.....	31
8.3.1	BASIC	31
8.3.1.1	Status	31
8.3.1.2	Wizard.....	32
8.3.1.3	Call Log	34
8.3.1.4	LANGUAGE.....	35

8.3.2	Network	36
8.3.2.1	WAN Config	36
8.3.2.2	LQos&VLAN Config.....	38
8.3.2.3	Service Port	40
8.3.2.4	TIME&DATE	42
8.3.3	VOIP.....	43
8.3.3.1	SIP Config.....	43
8.3.3.2	Stun Config	51
8.3.3.3	DIAL PEER	53
8.3.4	Phone	56
8.3.4.1	DSP Config	56
8.3.4.2	FEATURE.....	58
8.3.4.3	DIAL PLAN.....	62
8.3.4.4	CONTACT	64
8.3.4.5	REMOTE CONTACT	67
8.3.4.6	WEB DIAL	68
8.3.4.7	MCAST.....	68
8.3.4.8	TONE.....	71
8.3.4.9	Action URL.....	72
8.3.5	Function Key	73
8.3.5.1	Function Key	73
8.3.5.2	EXT KEY.....	75
8.3.5.3	SOFTKEY.....	76
8.3.6	Maintenance	76
8.3.6.1	Auto Provision.....	76
8.3.6.2	Syslog Config.....	79
8.3.6.3	Config Setting.....	81
8.3.6.4	Update.....	81
8.3.6.5	ACCESS	83
8.3.6.6	Reboot.....	85
8.3.7	Security.....	85
8.3.7.1	WEB Filter	85
8.3.7.2	Firewall.....	86
8.3.7.3	VPN.....	87
8.3.7.4	Security.....	89
8.3.8	Logout.....	89
9	APPENDIX	91
9.1	SPECIFICATION	91
9.1.1	Hardware.....	91
9.1.2	Voice features.....	91
9.1.3	Network features	92
9.1.4	Maintenance and management	93
9.2	DIGIT-CHARACTER MAP TABLE	93

Introducing C66 VoIP Phone

1.1 Thank you for your purchasing C66

Thank you for purchasing the C66, C66 is a full-feature telephone that provides voice communication over the same data network that your computer uses. This phone functions not only much like a traditional phone, which allows you to place and receive calls, and enjoy other features that traditional phone has, but also it own many data services features which you could not expect from a traditional telephone.

This guide will help you easily use the various features and services available on your phone.

1.2 Delivery Content

Please check whether the delivery contains the following parts:

The base unit with display and keypad

The handset

The handset cable

The power supply

The Ethernet cable

The User Manual (you may download from our [website](#))

IP Phone are designed to look like conventional phones, the following photo shows a broad overview of the IP Phone.



1.3 Keypad

Key	Key name	Function Description
	Line1/2 /3/4	There are four SIP lines; user could select any one to make the call, if it has been registered.
		
		
		
 Soft key 1/2/3/4		Keys combination, include functions such as History/P-BOOK /DND /Menu /Del /Redial /Send / Quit/Answer/Divert/Reject/Hold/Transfer/Conf/Close and so on.
	Navigation	Navigation key assist users for operating. In idle state they have special function. You can configure through the web page according to your patterns of use.
	Directory	Access to phone book, check the record list and add new records and revise the record. When check the phone book record, press this key again will return to idle mode.
	History	View the Missed call, Incoming Call and Outgoing Call.
	Redial	1. In the hook off /hands-free mode, use the key to dial the last call number; 2. In stand-by mode, it has a function to check the Outgoing Call.
	Hands-free	Make the phone into hands-free mode.
	mute	Press this key in calling mode, you can hear the other side, and the other side cannot hear you.
	Volume +/-	Turn down or turn up the volume by pressing these two keys.



Indicator
light

If the light blinking, indicate the phone has missed call.



Digital
keyboard

Inputting the phone number or DTMF.



DSS keys You can configure them in the web page,.

1.4 Port for connecting

Port	Port name	Description
	Power switch	Input: 5V AC, 1A
	WAN	10/100M Connect it to Network
	LAN	10/100M Connect it to PC
	External console interface	Port type: RJ-45 direct connector
In the left side of the phone		
	Headset	Port type: RJ-9 connector
	Handset	Port type: RJ-9 connector

1.5 Icon introduction

Icon	Description
	Call out
	Call in
	Call hold
	Auto answer
	Call mute
	Contact
	DND(Do not Disturb)
	In hand free mode
	In handset mode
	In headset mode
	SMS
	Missed call
	Call forward

1.6 LED introduction

Table 1 Programmable key LEDs for BLF

LED Status	Description
Steady green	The object is in idle status
Slow blinking red	The object is ringing
Steady red	The object is active
Off	The object is failed/ No subscribe

Table 2 Programmable key LEDs for Presence

LED Status	Description
Steady green	The object is online

Slow blinking red	The object is ringing
Steady red	The object is active
Off	The object is failed/ No subscribe

Table 3 Line key LEDs

LED Status	Description
Steady green	The account is active
Fast Blinking green	There is an incoming call to the account
Slow Blinking green	The call is on hold/ Registration is unsuccessful
Off	The line is unapplied or idle

Table 4 Programmable key LEDs for line

LED Status	Description
Steady green	The account is active
Fast Blinking green	There is an incoming call to the account
Slow Blinking green	The call is on hold
Slow Blinking red	Registration is unsuccessful
Off	The line is not unapplied or idle

Table 5 Programmable key LEDs for MWI

LED Status	Description
Blinking green	There are new voice mails
Off	There is no new voice mail

Table 6 Power Indication LED

LED Status	Description
Steady red	Power on /There has note of miss incoming call (Enable the power function)
Fast Blinking red	There is an incoming call (Enable the power function)
Off	Power off/Disable the power function

2 Initial connecting and Setting

2.1 Connect the phone

2.1.1 Connect to network


Step 1: Connect the IP Phone to the corporate IP telephony network. Before you connect the phone to the network, please check if your network can work normally.

You can do this in one of two ways, depending on how your workspace is set up.

Direct network connection—by this method, you need at least one available Ethernet port in your workspace. Use the Ethernet cable in the package to connect WAN port on the back of your phone to the Ethernet port in your workspace. Since this VoIP Phone has router functionality, whether you have a broadband router or not, you can make direct network connect. The following two figures are for your reference.



Shared network connection—Use this method if you have a single Ethernet port in your workspace with your desktop computer already connected to it. First, disconnect the Ethernet cable from the computer and attach it to the WAN port on the back of your phone. Next, use the Ethernet cable in the package to connect LAN port on the back of your phone to your desktop computer. Your IP Phone now shares a network connection with your computer. The following figure is for your reference.

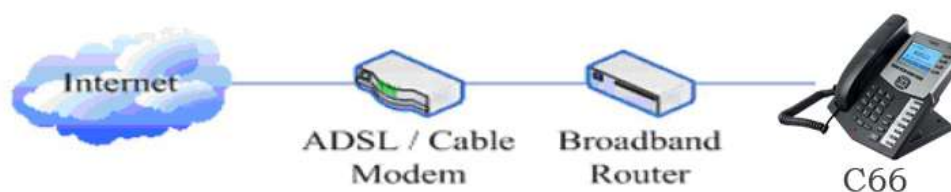

Step 2: Connect the handset to the handset port by the handset cable in the package.

Step 3: connect the power supply plug to the AC 5V adapter port on the back of the phone. Use the power cable to connect the power supply to a standard power outlet in your workspace.

Step 4: the phone's LCD screen displays "Initializing". Later, a ready screen typically displays the date, time.

If your LCD screen displays different information from the above, you need refer to the next section "Initial setting" to set your network online mode.

If your VoIP phone registers into corporate IP telephony Server, your phone is ready to use.

2.1.2 Power adaptor connection

Make sure that the power you use is comply with the parameters of power adaptor.

1. Plug power adaptor to power socket.
2. Plug power adaptor's AC output to the AC5V port of C66 to start up.
3. There will be displayed black line and "initializing... wait logon..." on the screen. After finishing startup, phone will show greeting, current date and time and so forth.
4. If phone has registered to the server, you can place or answer calls.

2.2 Basic Initialization

C66 is provided with a plenty of functions and parameters for configuration. User needs some network and VoIP knowledge so that user could understand the meanings of parameters. In order to make user use the phone more easily and convenient, there are basic configurations introduced which is mandatory to ensure phone calls.

2.2.1 Network settings

Make sure that network is connected already before setting network of phone. C66 uses DHCP to get WAN IP configurations, so phone could access to network as long as there is DHCP server in it. If there is no DHCP server available, phone has to be changed WAN network setting to Static IP or PPPoE.

Setting PPPoE mode (for ADSL connection)

1. Get PPPoE account and password first.
2. Press Menu->Settings->Advanced Setting, then enter passwords, and choose

network ->WAN->Net Mode, enter and choose PPPoE through navigation keys and press the Save key.

3. Press Quit, then choose PPPoE Set, press Enter.

4. The screen will show the current information. Press Del to delete it, then input your PPPoE user and password and press Save.

5. Press Quit six times to return to the idle screen.

6. Check the status. If the screen shows “**Negotiating...**” it shows that the phone is trying to access to the PPPoE Server; if it shows an IP address, then the phone has already get IP with PPPoE.

Setting Static IP mode (static ADSL/Cable, or no PPPoE / DHCP network)

1. Prepare the network's parameters first, such as IP Address, Net mask, Default Gateway and DNS server IP address. If you don't know this information, please contact the service provider or technician of network.

2. Press Menu->Settings->Advanced Setting, then enter passwords, and choose network ->WAN->Net Mode, enter and choose Static through navigation keys and press the Save key.

3. Press Quit, then choose Static Set, press Enter.

4. The screen will show the current information, and then press Del to delete. Input your IP address, Mask, Gateway, DNS and press Save to save what you input.

5. Press Quit six times to return to the idle screen.

6. Check the status, the screen shows “**Static**” .the screen shows the IP address and gateway which were set just now, if the phone could display the right time, it shows that Static IP mode takes effect.

Setting DHCP mode

1. Press Menu->Settings->Advanced Setting, then enter passwords, and choose network ->WAN->Net Mode, enter and choose DHCP through navigation keys and press the Save key.

2. Press Quit six times to return to the idle screen.

3. Check the status, the screen shows “**DHCP**”, If the screen shows the IP address and gateway which were set just now, it shows that DHCP mode takes effect.

3 C66's basic function

3.1 Making a call

3.1.1 Call Device

You can make a phone call via the following devices:

1. Pick up the handset,  icon will be showed in the idle screen.
2. Press the Speaker button,  icon will be showed in the idle screen.
3. Press the Headset button if the headset is connected to the Headset Port in

advance. The icon  will be showed in the idle screen.

You can also dial the number first, and then choose the method you will use to speak to the other party.

3.1.2 Call Methods

You can press an available line button if there is more than one account, then

1. Dial the number you want to call.
2. Press History softkey, use the navigation buttons to highlight your choice (press Left/Right button to choose Missed Calls, Incoming Calls and Outgoing Calls.
3. Press the RD button to call the last number called.
4. Press the programmable keys which are set as speed dial button.

Then press the Send button or Send softkey to make the call if necessary.

3.2 Answering a call

Answering an incoming call

1. If there is no other calling, you could choose the handle or press the speaker button or use softkey-answer or press the headset to accept the call.
2. If you are on another call, press the fluctuation navigation key to answer the new call.

During the conversation, you can alternate between Headset, Handset and Speaker phone by pressing the corresponding buttons or picking up the handset.

3.3 DND

Press DND softkey to active DND Mode. Further incoming calls will be rejected and the display shows:  icon. Press DND softkey twice to deactivate DND mode. You can find the incoming call record in the Call History.

3.4 Call Forward

This feature allows you to forward an incoming call to another phone number. The display showed  icon.

The following call forwarding events can be configured:

Off: Call forwarding is deactivated by default.

Always: Incoming calls are immediately forwarded.

Busy: Incoming calls are immediately forwarded when the phone is busy.

No Answer: Incoming calls are forwarded when the phone is not answered after a specific period.

To configure Call Forward via Phone interface:

1. Press Menu ->Features->Enter->Call Forward->Enter,choose one number and enter.
2. There are 4 options: Off, Always, Busy, No Answer.
3. If you choose one of them (except Off), enter the phone number you want to forward your calls to. Press Save to save the changes.

3.5 Call Hold

1. Press the Hold button or Hold softkey to put your active call on hold.
2. If there is only one call on hold, press the hold softkey to retrieve the call.
3. If there are more than one call on hold, press the line button, and the Up/Down button to highlight the call, then press the Unhold button to retrieve the call.

3.6 Call Waiting

1. Press Menu ->Features->Enter->Call Waiting->Enter.
2. Use the navigation keys to active or inactive call waiting.
3. Then press the Save to save the changes.

3.7 Mute

Press Mute button during the conversation, icon  will be showed in the LCD.

Then the called will not hear you, but you can hear the called. Press it again to get the phone to normal conversation.

3.8 Call transfer

1. Blind Transfer

During talk, press the key Transf, and then dial the number that you want to transfer to, and finished by "#". Phone will transfer the current call to the third party. After finishing transfer, the call you talk to will be hanged up. User can not select SIP line when phone transfers call.

2. Attended Transfer

During talk, press the key Transf, then input the number that you want to transfer to and press Send. After that third party answers, then press Transfer to complete the transfer. (You need enable call waiting and call transfer first).

3. Alert Transfer

During the talk, press Transf firstly, and then press Send after inputting the number that you want to transfer. You are waiting for connection, now, press Transf and the transfer will be done. (To use this feature, you need enable call waiting and call transfer first).

3.9 3-way conference call

1. Press the Conf softkey during an active call.
2. The first call is placed on hold. Then you will hear a dial tone. Dial the number to conference in, then press Send key.
3. When the call is answered, press Conf and add the first call to the conference.
4. If you want to release the conference, press Split key.

Note: the server that user uses must support RFC3515 or it might not be used (User must enable call waiting and three way call first).

3.10 Multiple-line

In this phone you can registe 6 SIP account numbers and the 6 accuonts can be used at the same time. There are four keys used as SIP line tolerant to make calls in SIP accounts. It will blink when the account registered failed.

In order to convenience the enterprise the phone support multiple call answering , call hold and multi-line call.The user can answer 10 incoming call phones at most,you can choose any call through pressing the fluctuation navigation key in talking and the other 9 calls will be in held.You also can press the fluctuation navigation key to change the call and recover the talking then last call will be held automatic.You also can define the six line keys as multi-line keys ,then each line key will relate to a call and you can choose the talking through pressing the line keys and recover the talking and the light to the line key will bright all the time when in taking ,then the light of the call in held is sparking.

If user has 4 line calls and wants to invite the five party during the call, they can press Softkey-Conf or Soft-XFER “New Call”, press OK, enter the number ,then press Send and wait for the other party to answer. When the multiple-way calls, you can press the arrow keys to select a call.

4 C66's advanced function

4.1 Call pickup

Call pickup is implemented by simulating pickup function of PBX. it's that, when A calls B, B rings but no answer, at this moment, C can hook off and input an appointed prefix plus B's number, pick up A's call and talk with A. The following chart shows how to configure an appointed prefix in dial peer to have call pick up function.

Number	Destination	Port	Mode	Alias	Suffix	Deleted Length
*1*T	0.0.0.0	5060	SIP	rep:pickup	no suffix	3

1 means appointed prefix code. After making the above configuration, C can dial *1* plus B's phone number to pick up A's call. User can set prefix in random, in the case of no affecting current dialing rules.

4.2 Join call

When B is calling C, A can join in the existing call by inputting an appointed prefix numbers plus B or C number, if B or C also supports join call. The following chart shows how to configure an appointed prefix in dial peer to have join call function.

Number	Destination	Port	Mode	Alias	Suffix	Deleted Length
*2*T	0.0.0.0	5060	SIP	rep:joincall	no suffix	3

2 means appointed prefix code. After making the above configuration, A can dial *2* plus B or C number to join B and C's call. User can set prefix in random, in the case of no affecting current dialing rules.

4.3 Redial / Unredial

If B is in busy line when A calls B, A will get notice: busy, please hang up. If A want to connect B as soon as B is in idle, he can use redial function at the moment and he can dials an appointed prefix number plus B's number to realize redial function.

What is redial function? A can't not build a call with B when B is in busy, then A will subscribe B's calling mode at 60 second intervals. Once B is available, A will get reminder of rings to hook off, while A hooks off, A will call B automatically. If at this time A is occupied temporarily and unwilling to contact B, A also can cancel the redial function by dialing an appointed prefix plus B's

number before making the redial function.

Number	Destination	Port	Mode	Alias	Suffix	Deleted Length
*3*T	0.0.0.0	5060	SIP	rep:redial	no suffix	3
*4*T	0.0.0.0	5060	SIP	rep:unredial	no suffix	3

3 is appointed prefix code. After making the above configuration, A can dial *3* plus B's phone number to make the redial function.

4 is appointed prefix code. After configuration, A can dial *4* to cancel redial function.

User can set prefix in random, in the case of no affecting current dialing rules.

4.4 Click to dial

When user A browses in an appointed Web page, user A can click to call user B via a link (this link to user B), then user A's phone will ring, after A hooks off, the phone will dial to B.

Notice : It needs a external software what supports click to dial.

4.5 Call back

This function allows you dial out the last phone call you received.

4.6 Auto answer

Choose menu ->feature ->auto answer ->enter ->choose account ->enter,enable the feature and set the delay time.When there is an incoming call, after no answer time, the phone will answer the call automatically.

4.7 Hotline

You can set hotline number for every sip, and then enter the dialer interface and after Warm Line Time, the phone will call out the hotline number automatically

4.8 Application

4.8.1 SMS

1) Press Menu ->Application->Enter->SMS->Enter.

2) Use the navigation keys to highlight the options. You can read the message

in the Inbox/Outbox.

3) After view the new message, you can press Reply to reply the message, and use the 123 softkey to change the Input Method, when enter the reply message, press OK, then use the navigation keys to select the line from which you want to send, then Send.

4) If you want to write a message, you can press New and enter message. Use the 123 softkey to change the Input Method. When you input the message you want to send, press OK, then use the navigation keys to select the line from which you want to send, then Send.

5) If you want to delete the message, after view the message, press Del, then you have three options to choose: Yes, All, No.

4.8.2 Memo

You can add some memos to record some important things to remind you.

Press Menu->Application->Memo->Enter->Add.

There are some options to configure: Mode, Date, Time, text, Ring. When the configuration is completed, press Save.

4.8.3 Voice Mail

1) Press Menu-> Application->Voice Mail->Enter.

2) Use the navigation keys to highlight the line for which you want to set, press Edit, and use the navigation key to turn on the mode, and the input the number. Press 123 softkey to choose the proper input method.

3) Press Save to save the change.

4) To view the new voicemail, Press the Voicemail softkey directly. Press Dial, then you may be prompted to enter the password, then you can listen to your new and old messages.

4.9 Ping

1) Press Menu-> Application->ping>Enter.

2) Input the IP you want ,and press start key ,if input wrong, you can press “delete” to modification the IP.

3) After input the IP, wait a moment it will display”confirmation” , it means ping successful ,or means ping failed.

4.10 Programmable Key Configuration

The phone has 12 programmable keys which are able to set up to many

functions per key. The following list shows the functions you can set on the programmable keys and provides a description for each function. The default configuration for each key is N/A which means the key hasn't been set for any functions.

1. Set the type as Memory Key

Press Menu->Settings->Basic Setting->Enter->DSS Key, you have two options: Line As DSS Keys and Memory As DSS Keys, choose one you want to make the assignment, use the navigation key to choose the type as memory key. In the Dial field, you have some options, such as Normal, Speed Dial, Intercom, BLF, Presence, MWI and call park.

Speed dial

You can configure the key as a simplified speed dial key, input the speed dial number and choose the speed dial feature, then you can press the Memory key to call the number directly. This key function allows you to easily access your most dialed numbers.

Intercom

You can configure the key for Push to talk code and it is useful in an office environment as a quick access to connect to the operator or the secretary.

BLF

BLF is also called "Busy lamp field", and it is used to prompt the user to pay attention to the state of the object than has been subscribed, and used to cooperate with the server to pick up the phone call. You can configure the key for Busy Lamp Field (BLF) which allows you to monitor the status (idle, ringing, or busy) of other SIP account. User can dial out on a BLF configured key. Please refer to "LED Instruction" for more detail about the LED status in different situation.

Note: In the Web interface, you can also set the pickup number to active the pickup function. For example, if you set the BLF number as 212, and the pickup number is 189, then when there is an incoming call to 212, press the BLF key, it will call out the 189 automatically to pick up the incoming call on 212.

Presence

Presence is called present, and compared to the BLF, it can also check whether object online

Note: You can subscribe the BLF and presence station of the same number at the same time.

MWI

When the key is configured as MWI, you are allowed to access voicemail quickly by pressing this key.

CALL PARK

You need setting a server number, when you have set what represent Call park. If you have a calling and you busy now, you could press the key and hear a number, then you could choose other phone and input this number. so you can directly recover call..

Call forward

When there is an incoming call, press the key and the incoming call can be transferred to the number set up.

2. Set the type as Line

You can set these keys as line keys, and press it, it will enter dialer interface.

3. Set the type as Key Event

You can set these keys as Key Event, and the subtype have many options.

Choose one and it will have corresponding function.

- None
- MWI
- DND (Do Not Disable)
- Hold
- Transfer
- Phone Book
- Redial
- Pick up
- Join
- Auto Redial On
- Auto Redial Off
- Call Forwarding
- History
- Flash
- Memo
- Headset
- Release: Press the key you can end the call.
- Lock: Press the key you can lock the keyboard.
- SMS
- Call Back
- Power Light
- Hide DTMF
- Prefix
- Hot Desking: Pressing the key, you can clear all sip information and register yourself sip information
- Agent

4. Set the type as Dtmf

You can configure the key as Dtmf. This key function allows you to easily dial or edit dial number.

5. Set the type as Remote

You need to match a XML Phonebook address, pressing the button you can directly access the corresponding remote phonebook.

6. Set the type as BLF List Key

It needs the cooperation with the Broadsoft server. The traditional BLF is that every number will need to be subscribed, so if the numbers that subscribed is so many that it will cause to obstruction. However, BLF List Key will put the

numbers that needed to be subscribed in a group, and the phone use the URL of the group to subscribe and analyze the specific information of each number such as number, name, state and so on according to the notifications from the server. Then set the idle Memory key as BLF List Key, later if the state of an object changes, the corresponding LED will change.

7.set the type as Multicast

Set the multicast address and audio code, press this key to initiate the multicast.

Notice: Detailed feature see 8.3.4.7

5 C66's other functions

5.1 Auto Handdown

1. Press Menu ->Features-> Enter->Auto Handdown-> Enter.
2. Set the Mode Enable through the navigation key, then set Time, unit is minute, then press Save.
3. When the call ends, after the time that you have set, the phone will back to the idle interface.

5.2 Ban Anonymous Call

1. Press Menu ->Features-> Enter->Ban Anonymous Call-> Enter.
2. Choose which sip you want to enable Ban Anonymous Call, and then press Enter, choose Enabled or Disabled through navigation key.
3. If you choose Enabled, the others can't call the phone by anonymous. If you choose Disabled, the others can call the phone by anonymous.

5.3 Ban Outgoing

1. Press Menu ->Features-> Enter->ban outgoing> Enter
- 2.Enable the function, then you can not call any number.

5.4 Dial Plan

1. Press Menu ->Features-> Enter->Dial Plan-> Enter.
2. The following plans you can set: Press # to Send, Timeout to Send, Timeout, Fixed Length Number, Press # to Do BREFER, BREFER On Onhook, AXFER On Onhook. You can enable or disable each dial plan.

5.5 Dial Peer

1. Press Menu ->Features-> Enter->Dial Peer-> Enter.
2. Press Add to enter the Edit interface, and then input some information. For example: Number: 1T, Dest.: 0.0.0.0, Port: 5060, Mode: SIP, Alisa: all:3333, Suffix: no suffix, Del Len: 0. Then press Save. Then press Save.
3. Input 1+number (1234) in the dial interface, you can dial out 3333.

You can refer to 8.3.3.4 DIAL PEER.

5.6 Auto Redial

1. Press Menu ->Features-> Enter->Auto Redial-> Enter.
2. Choose Mode Enabled or Disabled through the navigation key. If you choose Enable, you also need to set Interval and Times, and then press Save.
3. After enable auto redial, calling out someone, if he is in busy, it will pop up a prompt box whether to auto redial, press OK, the phone will call out him according the Interval and Times that you set.

5.7 Call completion

1. Press Menu ->Features-> Enter->Call Completion-> Enter.
2. Enable the function through the navigation key, and then Save.
3. Call out others, if he is in busy, it will pop up a prompt Call Completion Waiting number? Press OK, when he is in idle, it will pop up a prompt Call Completion Call number? Press OK, the phone will call out the number automatically.

5.8 Ring From Headset

1. Press Menu ->Features-> Enter->Ring From Headset-> Enter.
2. Enable this function through the navigation key, the phone connects the headset, when the phone has an incoming call, it will ring from the headset.

5.9 Power Light

1. Press Menu ->Features-> Enter->Power Light-> Enter.
2. Enable this function through the navigation key.

5.10 Hide DTMF

1. Press Menu ->Features-> Enter->Hide DTMF-> Enter.
2. Through the navigation key to choose: Disabled, All, Delay, Last Show. When you set up a call with others and need to input the DTMF, the DTMF will show as you have set.

5.11 Password Dial

1. Press Menu ->Features-> Enter->Password Dial-> Enter.
2. Enable this function, you can also set Prefix and Length. For example, you want call out 1234567 and you set Password Dial Prefix 123 and Password Length 3, then enter the dial interface and input 1234567, and then the screen will show 123***7.

5.12 Pre Dial

1. Press Menu ->Features-> Enter->Pre Dial-> Enter.
2. Through navigation key to enable the feature,and to realize the Pre Dial function.

5.13 Action URL & Active URI

1. Action URL: The action that the phone carries out e.g. open dnd can produces one URL, then the phone can send the HTTP Get of the URL to PC, then the phone can report the action to the PC.
2. Active URI: Enter the web page of the phone, PHONE->FEATURE, input Active URL Limit IP, You can input internet server (e.g. PC'IP), PC can send one URL to the phone, the phone will produce one action for example open dnd, so PC can control the phone.

5.14 Push XML

Enter the web page of the phone->PHONE->FEATURE, input Push XML Server(e.g. PC'IP), then PC can push text, SMS, phonebook, advertisement,, execute etc. to phone to update the message or the phone makes an action.

6 C66's basic setting

6.1 Keyboard

1. Press Menu ->Settings-> Enter->Basic Setting-> Enter->Keyboard->Enter.
2. There are four items: DSS Keys, Multiplex, Long Click, SoftKey, You can set up respectively on them. Press the key Enter to the interface, then use the navigation keys to choose the function for the key according to you want.
3. Press the key OK to save.

6.2 Screen Set

1. Press Menu ->Settings-> Enter->Basic Setting-> Enter->Screen Set->Enter.
2. You can set Contrast , contrast calibration and Brightness, press Enter and use the navigation keys to set, then press the key Save.

6.3 Ringer Set

1. Press Menu ->Settings-> Enter->Basic Setting-> Enter->Ringer Set->Enter.
2. You can set Ringer Volume and Ringer Type, press Enter and use the navigation keys to set, then press the key Save. In the Ringer Type, the default system rings have nine and the custom ringtones have three that can be set through the web page.

6.4 Voice Volume

1. Press Menu ->Settings-> Enter->Basic Setting-> Enter->Voice Volume->Enter.
2. Use the navigation keys to turn down or turn up the voice volume, the press the key Save.

6.5 Time & Date

1. Press Menu ->Settings->Enter->Basic Setting-> Enter->Time & Date->Enter.
2. You have two options to choose: Auto and Manual, use the navigation keys to choose, then press Save.

6.6 Greeting Word

1. Press Menu ->Settings-> Enter->Basic Setting-> Enter->Greeting Word->Enter.
2. You can enter the message and press Save, it will display in the phone screen when the phone start up.

6.7 Language Set

1. Press Menu ->Settings-> Enter->Basic Setting-> Enter->Language Set->Enter.
2. C66 support six languages, namely English, Chinese, French, Spanish, Italian and Turkish, you can use the navigation keys to make a choice.

7 C66's advanced settings

7.1 Account

Press Menu->Enter->Advanced settings, and then input the password to enter the interface, the default password is 123. You can set it through the web page. Then choose Account then press Enter, you can do some sip settings.

7.2 Network

Press Menu->Enter->Advanced settings, and then input the password to enter the interface. Then choose Network and press Enter, you can do network settings, you can refer to 2.2.1 Network settings.

7.3 Security

Press Menu->Setting->Advanced settings, and then input the password to enter the interface. Then choose Security, you can configure Menu Password, Keylock Password and Keylock Status.

7.4 Maintenance

Press Menu->Enter->Advanced settings, and then input the password to enter the interface. Then choose Maintenance and press Enter, you can configure Auto Provision, Backup, and Upgrade.

7.5 Factory Reset

Press Menu->Enter->Advanced settings, and then input the password to enter the interface. Then choose Factory Reset and press Enter, you can choose Yes or No.

8 Web configuration

8.1 Introduction of configuration

8.1.1 Ways to configure

There are three different configurations with C66 for different users..

- Use phone keypad.
- Use web browser (recommendatory way) .
- Use telnet with CLI command.

8.1.2 Password Configuration

There are two levels to access to phone: root level and general level. User with root level can browse and set all configuration parameters, while user with general level can set all configuration parameters except SIP (1-6) or IAX2's that some parameters cannot be changed, such as server address and port. User will has different access level with different username and password.

- Default user with general level:

- ◆ username: guest

- ◆ password: guest

- Default user with root level:

- ◆ username: admin

- ◆ password: admin


The default password of phone screen menu is 123.

8.2 Setting via web browser

When this phone and PC are connected to network, enter the IP address of the wan port in this phone as the URL (e.g. <http://xxx.xxx.xxx.xxx/> or <http://xxx.xxx.xxx.xxx:xxxx/>).

If you do not know the IP address, you can look it up on the phone's display by

pressing Status button.
The login page is as below picture

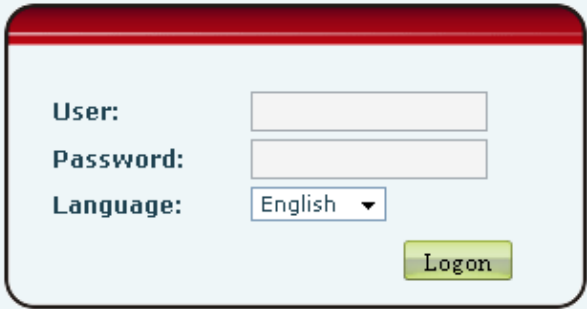


A login form with a red header bar. It contains three input fields: 'User:', 'Password:', and 'Language:'. The 'Language:' field is a dropdown menu currently showing 'English'. A green 'Logon' button is located at the bottom right of the form.

After you configure the IP phone, you need click save button in config under Maintenance in the left catalog to save your configuration. Otherwise the phone will lose your modification after power off and on.

8.3 Configuration via WEB

8.3.1 BASIC

8.3.1.1 Status

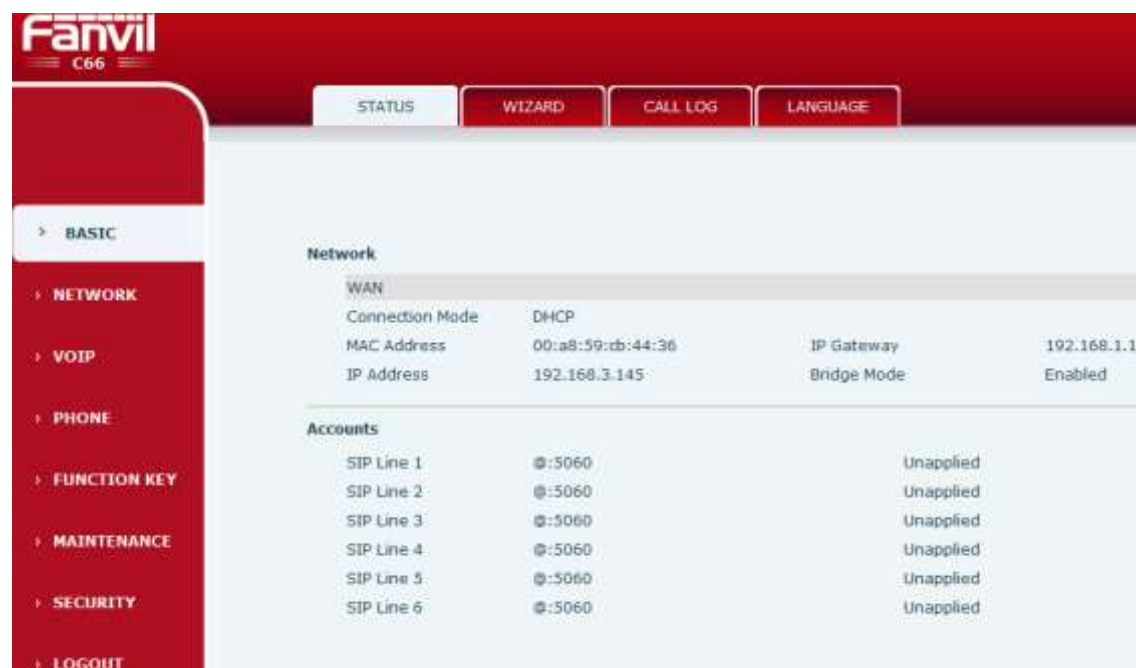

The screenshot shows the Fanvil C66 web interface. The top navigation bar includes 'STATUS', 'WIZARD', 'CALL LOG', and 'LANGUAGE'. The left sidebar has a menu with 'BASIC' selected, and sub-items: 'NETWORK', 'VOIP', 'PHONE', 'FUNCTION KEY', 'MAINTENANCE', 'SECURITY', and 'LOGOUT'. The main content area displays the 'Network' and 'Accounts' sections.

Network			
WAN			
Connection Mode	DHCP		
MAC Address	00:a8:59:db:44:36	IP Gateway	192.168.1.1
IP Address	192.168.3.145	Bridge Mode	Enabled

Accounts		
SIP Line 1	@:5060	Unapplied
SIP Line 2	@:5060	Unapplied
SIP Line 3	@:5060	Unapplied
SIP Line 4	@:5060	Unapplied
SIP Line 5	@:5060	Unapplied
SIP Line 6	@:5060	Unapplied

Status

Field name	Explanation
Network	Shows the configuration information on WAN and LAN port, including the connect mode of WAN port (Static, DHCP, PPPoE), MAC address, the IP address of WAN port and LAN port, ON or OFF of DHCP mode of LAN port and bridge mod
Accounts	Shows the phone numbers provided by the SIP LINE 1-6servers and IAX2. The last line shows the version number and issued date.

8.3.1.2 Wizard

The screenshot shows a web interface with a red header bar containing four tabs: STATUS, WIZARD, CALL LOG, and LANGUAGE. The WIZARD tab is active. Below the tabs, the main content area is light blue. It features a section titled 'Network Mode' with three radio button options: 'Static IP Mode' (which is selected), 'DHCP Mode', and 'PPPoE Mode'. A 'Next' button is located at the bottom right of the configuration area.

Wizard

Please select the proper network mode according to the network condition.
C66 provide three different network settings:

- Static: If your ISP server provides you the static IP address, please select this mode, and then finish Static Mode setting. If you don't know about parameters of Static Mode setting, please ask your ISP for them.
- DHCP: In this mode, you will get the information from the DHCP server automatically; need not to input this information artificially.
- PPPoE: In this mode, you must input your ADSL account and password. You can also refer to 2.2.1 Network setting to speed setting your network.

Choose Static IP MODE, click **【NEXT】** can config the network and

SIP(default SIP1) simply, also can browse too. Click **【BACK】** can return to the last page.

Static IP Settings

IP Address	192.168.1.179
Subnet Mask	255.255.255.0
IP Gateway	192.168.1.1
DNS Domain	
Primary DNS	202.96.134.133
Secondary DNS	202.96.128.68

IP Address	Input the IP address distributed to you.
Subnet Mask	Input the Netmask distributed to you.
IP Gateway	Input the Gateway address distributed to you.
DNS Domain	Set DNS domain postfix. When the domain which you input cannot be parsed, phone will automatically add this domain to the end of the domain which you input before and parse it again.
Primary DNS	Input your primary DNS server address.
Secondary DNS	Input your standby DNS server address.

Quick SIP Settings

Display Name	4113
Server Address	192.168.1.2
Server Port	5060
Authentication User	4113
Authentication Password	
SIP User	4113
Enable Registration	☒

Display Name	Set the display name.
Server Address	Input your SIP server address.
Server Port	Set your SIP server port.
Authentication User	Input your SIP registered account name.
Authentication Password	Input your SIP registered password.
SIP User	Input the phone number assigned by your VOIP service provider.
Enable Registration	Start to register or not by selecting it or not.

WAN	
Connection Mode	Static IP
Static IP Address	192.168.1.114
IP Gateway	192.168.1.1
SIP	
Server Address	192.168.1.2
Account	4113
Phone Number	4113
Registration	Enabled
Back Finish	

Display detailed information that you manual config.

Choose DHCP MODE, click **【NEXT】** can config SIP(default SIP1) simply, also can browse too. Click **【BACK】** can return to the last page. Like Static IP MODE。

Choose PPPoE MODE, click **【NEXT】** can config the PPPoE account/password and SIP(default SIP1) simply, also can browse too. Click **【BACK】** can return to the last page. Like Static IP MODE。

PPPoE Settings	
Service Name	ANY
User	user123
Password	••••••••
Back Next	

Server Names	It will be provided by ISP.
--------------	-----------------------------

User	Input your ADSL account.
------	--------------------------

Password	Input your ADSL password.
----------	---------------------------

Notice: Click **【Finish】** button after finished your setting, IP Phone will save the setting automatically and reboot, After reboot, you can dial by the SIP account.

8.3.1.3 Call Log

You can query all the outgoing through this page.

Call Information

Start Time

Duration

Dialed Calls

Call Log

Field name	explanation
Start Time	Display the start time of the outgoing record.
Duration	Display the conversation time of the outgoing record.
Dialed Calls	Display the account/protocol/line of the outgoing record.

8.3.1.4 LANGUAGE

STATUS WIZARD CALL LOG LANGUAGE

Language

Language Selection English

Greeting Words

Greeting Words VOIP PHONE (0-12 character(s))

Apply

MMI SET

Field name	explanation
Language	Set the language of phone, English is default.
Greeting Words	The greeting message will display on LCD when phone is idle. It can support 16 chars. the default chars are VOIP PHONE.
Notice: the maximal length of the greeting message is sixteen English characters and five Chinese characters	

8.3.2 Network

8.3.2.1 WAN Config

WAN

QoS&VLAN

SERVICE PORT

TIME&DATE

WAN Status

Active IP Address

192.168.3.145

Current Subnet Mask

255.255.0.0

Current IP Gateway

192.168.1.1

MAC Address

00:a8:59:cb:44:36

MAC Timestamp

20130109

WAN Settings

Obtain DNS Server Automatically

Enabled

Enable Vendor Identifier

Disabled

Vendor Identifier

Fanvil C66

Static IP

☐

DHCP

☒

PPPoE

☐

Apply

802.1X Settings

802.1x Mode

Disable

Identity

admin

Password

•••••

CA Certificate

Browse

Upload

Device Certificate

Browse

Upload

Apply

WAN Config

WAN Status	
Active IP Address	192.168.3.145
Current Subnet Mask	255.255.0.0
Current IP Gateway	192.168.1.1
MAC Address	00:a8:59:cb:44:36
MAC Timestamp	20130109

Active IP Address	The current IP address of the phone.
Current Subnet Mask	The current Netmask address.
MAC Address	The current MAC address of the phone.

Current IP Gateway	The current Gateway IP address.
MAC Timestamp	Shows the time of getting MAC address

WAN Settings

Obtain DNS Server Automatically:

Enable Vendor Identifier:

Vendor Identifier:

Static IP: ☐ DHCP: ☒ PPPoE: ☐

Please select the proper network mode according to the network condition.
C66 provide three different network settings:

- Static: If your ISP server provides you the static IP address, please select this mode, then finish Static Mode setting. If you don't know about parameters of Static Mode setting, please ask your ISP for them.
- DHCP: In this mode, you will get the information from the DHCP server automatically; need not to input this information artificially.
- PPPoE: In this mode, you must input your ADSL account and password. You can also refer to 2.2.1 Network setting to speed setting your network.

Obtain DNS server automatically	Select it to use DHCP mode to get DNS address, if you don't select it, you will use static DNS server. The default is selecting it.
Enable Vendor Identifier	Enable/Disabled Vendor Identifier
Vendor Identifier	Custom vendor identification

IP Address:

Subnet Mask:

IP Gateway:

DNS Domain:

Primary DNS:

Secondary DNS:

If you use static mode, you need set it.	
IP Address	Input the IP address distributed to you.
Subnet Mask	Input the Netmask distributed to you.
IP Gateway	Input the Gateway address distributed to you.
DNS Domain	Set DNS domain postfix. When the domain which you input cannot be parsed, phone will automatically add this domain to the end of the domain which you input before and parse it again.
Primary DNS	Input your primary DNS server address.
Sencondary DNS	Input your standby DNS server address.

Service Name	ANY
User	user123
Password	••••••••

If you uses PPPoE mode, you need to make the above setting.


PPPoE Server	It will be provided by ISP.
User	Input your ADSL account.
Password	Input your ADSL password.


Notice:

- 1) Click “Apply” button after finished your setting, IP Phone will save the setting automatically and new setting will take effect.
- 2) If you modify the IP address, the web will not response by the old IP address. Your need input new IP address in the address column to logon in the phone.
- 3) If networks ID which is DHCP server distributed is same as network ID which is used by LAN of system, system will use the DHCP IP to set WAN, and modify LAN’s networks ID (for example, system will change LAN IP from 192.168.10.1 to 192.168.11.1) when system uses DHCP client to get IP in startup; If system uses DHCP client to get IP in running status and network ID is also same as LAN’s, system will refuse to accept the IP to configure WAN. So WAN’s active IP will be 0.0.0.0

8.3.2.2 LQos&VLAN Config

The VOIP phone support 802.1Q/P protocol and DiffServ configuration. VLAN functionality can use different VLAN IDs by setting signal/voice VLAN and data VLAN. The VLAN application of this phone is very flexible.

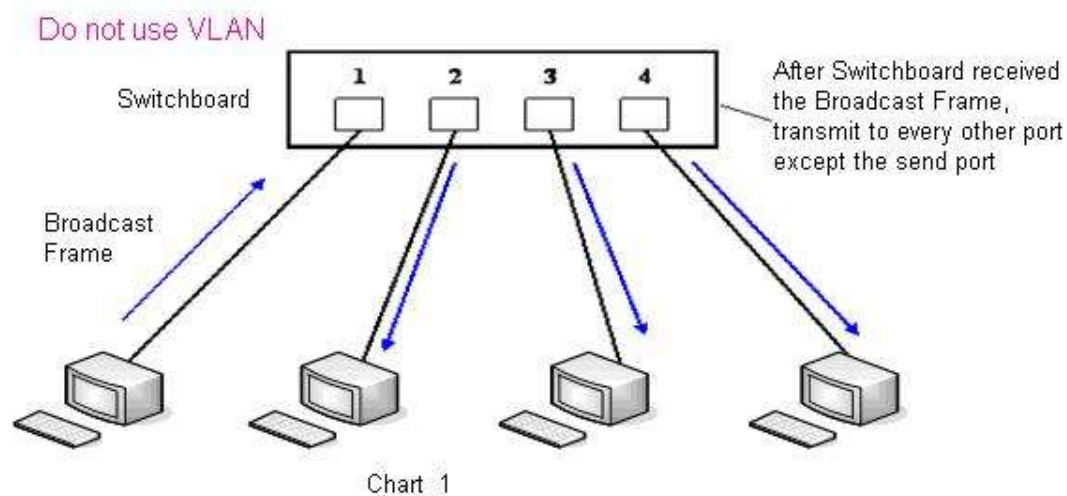

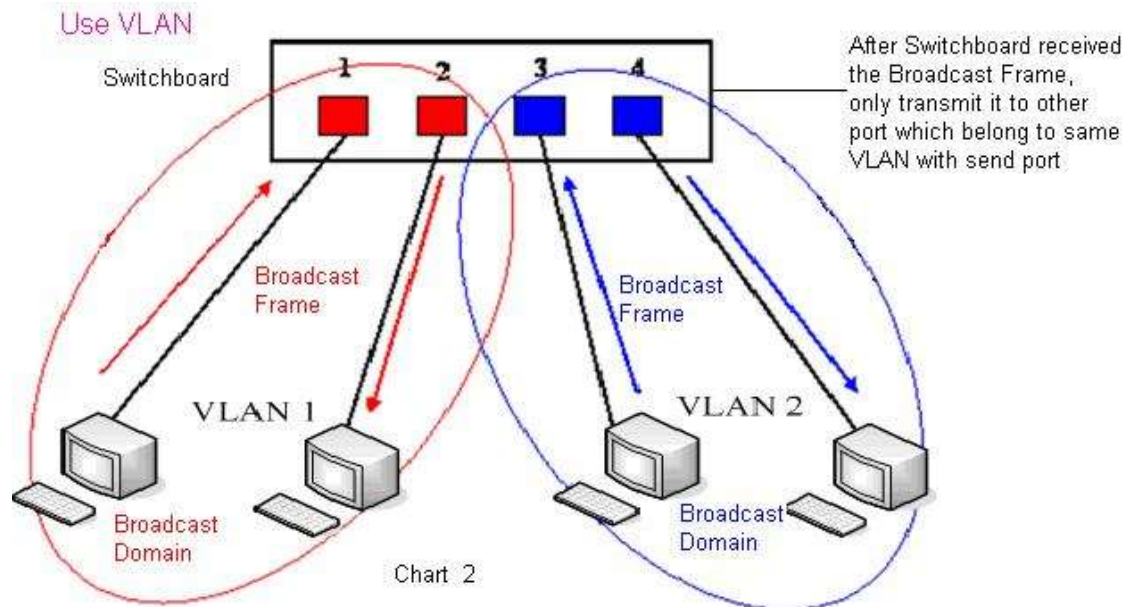

In chart 1, there is a layer 2 that switches without setting VLAN. Any broadcast frame will be transmitted to the other ports except the send port. For example, a broadcast information is sent out from port 1 then transmitted to port 2,3and 4. In chart 2, red and blue indicate two different VLANs in the switch, and port 1 and port 2 belong to red VLAN, port 3 and port 4 belong to blue VLAN. If a broadcast frame is sent out from port 1, switch will transmit it to port 2, the other port in the red VLAN and not transmit it to port3 and port 4 in blue VLAN. By this means, VLAN divide the broadcast domain via restricting the range of broadcast frame transition.

Note: chart 2 use red and blue to identify the different VLAN, but in practice, VLAN uses different VLAN IDs to identify.

WAN	QoS&VLAN	SERVICE PORT	TIME&DATE
Link Layer Discovery Protocol (LLDP) Settings			
Enable LLDP		☐	Packet Interval(1~3600) 60 second(s)
Enable Learning Function		☐	
Quality of Service (QoS) Settings			
Enable DSCP		☐	SIP DSCP 46 (0~63)
Audio RTP DSCP 46 (0~63)			
WAN Port VLAN Settings			
Enable WAN Port VLAN		☐	WAN Port VLAN ID 256 (0~4095)
SIP 802.1P Priority 0 (0~7)			Audio 802.1P Priority 0 (0~7)
LAN Port VLAN Settings			
LAN Port VLAN Mode Follow WAN			LAN Port VLAN ID 254 (0~4095)
Apply			

QoS&VLAN Configuration

LLDP Setting	
Enable LLDP	Enable LLDP by selecting it
Enable Learning Function	After enabling LLDP Learn, telephone can automatically learn the data of DSCP, 802.1p, VLAN ID from the switch. If the data is different from the data of the LLDP server, telephone will change its own value as the value of the switch (Synchronous with VLAN in switch)
Package Interval	The time interval of sending LLDP Packet
QoS Setting	
Enable DSCP	Enable DSCP by selecting it
SIP DSCP	Specify the value of the SIP DSCP
Audio RTP DSCP	Specify the value of the Audio RTP DSCP
WAN VLAN Setting	
Enable WAN Port VLAN	Enable WAN Port VLAN by selecting it
WAN Port VLAN ID	Specify the value of the WAN Port VLAN ID, the range of the value is 0-4095
SIP 8021.p Priority	Specify the value of the signal 8021.p priority, the range of the value is 0-7
Audio 802.1p Priority	Specify the value of the voice 8021.p priority, the range of the value is 0-7
LAN VLAN Setting	
LAN Port VLAN Mode	Follow WAN: Follow the WAN ID Disable: Disable Port VALN Enable: Enable Port VLAN and specify the Port VLAN ID different from WAN ID
LAN Port VLAN ID	Specify the value of the Port VLAN ID different from WAN ID, the range of the value is 0-4095

8.3.2.3 Service Port

You can set the port of telnet/HTTP/RTP by this page.

WAN
QoS&VLAN
SERVICE PORT
TIME&DATE

Service Port Settings ⓘ

Web Server Type

HTTP

HTTP Port

80

HTTPS Port

443

RTP Port Range Start

10000

RTP Port Quantity

200

Apply

SERVICE PORT

Field name	explanation
Service Port	
Web Server Type	Specify Web Server Type
HTTP Port	Set web browser port, the default is 80 port, if you want to enhance system safety, you'd better change it into non-80 standard port; Example: The IP address is 192.168.1.70. and the port value is 8090, the accessing address is http://192.168.1.70:8090
HTTPS Port	Before using the https, you must download https authentication certification into the phone, then set web browser port, the default is 443 port, if you want to enhance system safety, you'd better change it into non-443 standard port. You can access to the web in https after rebooting the phone.
RTP Port Range Start	Set the RTP Start Port. It is dynamic allocation.
RTP Port Number	Set the maximum quantity of RTP Port, the default is 200.

Notice:

- 1) You need save the configuration and reboot the phone after set this page.
- 2) Please REBOOT the system if you modify the HTTP or telnet port number (the new number should be greater than 1024.)
- 3) If you set 0 for the HTTP port, it will disable HTTP service.

8.3.2.4 TIME&DATE

Setting time zone and SNTP (Simple Network Time Protocol) server according to your location, you can also manually adjust date and time in this web page.

WAN

QoS&WLAN

SERVICE PORT

TIME&DATE

Simple Network Time Protocol (SNTP) Settings

Enable SNTP

☒

Enable DHCP Time

☐

Primary Server

Secondary Server

Timezone

(GMT-12:00)International Date Line West

Resync Period

second(s)

12-Hour Clock

☐

Date Format

1 Jan,Mon

Apply

Daylight Saving Time Settings

Enable

☐

Offset

minutes(s)

Month

March

October

Week

5

5

Day

Sunday

Sunday

Hour

Minute

Apply

Manual Time Settings

Year

Month

Day

Hour

Minute

Apply

TIME&DATE

Field name	explanation
Simple Network Time Protocol (SNTP) Settings	
Enable SNTP	Enable SNTP by selecting it

Enable DHCP Time	Enable DHCP Time by selecting it, then the phone will automatically synchronize the standard time.
Primary Server	Set SNTP Primary Server IP address.
Secondary Server	Set SNTP Secondary Server IP address
Time Zone	Select the Time zone according to your location.
Resync Period	Set the time out, the default is 60 seconds.
12 -Hours Clock	Switch the time mechanism between 12 hours and 24 hours. Default is 24 hours mode.
Date format	Specify the date format
Daylight Saving Time Settings	
Enable	Enable daylight saving time
Offset(minutes)	Setup the variety length
Month	Setup start and end month
Week	Setup start and end week
Day	Setup start and end day
Hour	Setup start and end hours
Minute	Setup start and end minutes
Manual Time Settings	

Manual Time Settings

Year

Month

Day

Hour

Minute

Apply

Notice: First of all, you need to disable the SNTP service, and above the date hours minutes each of which is required to complete and submit to make manually.

8.3.3 VOIP

8.3.3.1 SIP Config

Set your SIP server in the following interface.

SIP Line

SIP 1

Basic Settings >>

Status	Unapplied	Domain Realm	
Server Address		Proxy Server Address	
Server Port		Proxy Server Port	
Authentication User		Proxy User	
Authentication Password		Proxy Password	
SIP User		Backup Proxy Server Address	
Display Name		Backup Proxy Server Port	5060
Enable Registration	☐	Server Name	

Codecs Settings >>

Disabled Codecs G.711A G.711U G.722 G.723.1 G.726-32 G.729AB ILBC AMR AMR-WB → ←	Enabled Codecs ↑ ↓
--	--

Advanced SIP Settings >>

Forward Type	Disabled	Enable Hotline	☐
Forward Number		Hotline Number	
No Ans. Fwd Wait Time	60 (0~120)second(s)	Warm Line Wait Time	0 (0~9)second(s)
Transfer Timeout	0 second(s)	BLF Server	
SIP Encryption	☐	Enable Auto Answer	☐
SIP Encryption Key		Auto Answer Timeout	60 second(s)
RTP Encryption	☐	Enable Session Timer	☐
RTP Encryption Key		Session Timeout	0 second(s)
Subscribe For MWI	☐	Conference Type	Local
MWI Number		Conference Number	
Subscribe Period	3600 second(s)	Registration Expires	3600 second(s)
Enable Service Code	☒	DND Off Code	
DND On Code		Always CFwd Off Code	
Always CFwd On Code		Busy CFwd Off Code	
Busy CFwd On Code		No Ans. CFwd Off Code	
No Ans. CFwd On Code		Ban Anonymous Off Code	222
Ban Anonymous On Code	111		

Keep Alive Type	SIP Option ▼	Keep Alive Interval	60 second(s)
User Agent		Server Type	COMMON ▼
DTMF Type	AUTO ▼	RFC Protocol Edition	RFC3261 ▼
DTMF SIP INFO Mode	Send 10/11 ▼	Local Port	5060
Ring Type	Default ▼	Anonymous Call Edition	None ▼
Enable Rport	☐	Keep Authentication	☐
Enable PRACK	☐	Ans. With a Single Codec	☐
Enable Long Contact	☐	Auto TCP	☐
Convert URI	☒	Enable Strict Proxy	☐
Dial Without Registered	☐	Enable GRUU	☐
Ban Anonymous Call	☐	Enable Displayname Quote	☐
Enable DNS SRV	☐	Enable user=phone	☒
Enable Missed Call Log	☒	Click To Talk	☐
BLF List Number		Transport Protocol	UDP ▼
Enable BLF List	☐	Use VPN	☒
Respond 182 when Call waiting	☐	Enable DND	☐

SIP Global Settings >>

Strict Branch	☐	Enable Group	☐
Registration Failure Retry Time	32	second(s)	

SIP Config

Field name	explanation
SIP Line	
Choose line to set info about SIP, there are 4 lines to choose. You can switch by 【Load】 button.	
Basic Settings	
Status	Shows if the phone has been registered the SIP server or not; or so, show Unapplied.
Server Address	Input your SIP server address.
Server Port	Set your SIP server port.
Authentication User	Input your SIP register account name.
Authentication Password	Input your SIP register password.
SIP User	Input the phone number assigned by your VoIP service provider. Phone will not register if there is no phone number configured.
Display Name	Set the display name.
Proxy Server Address	Set proxy server IP address(Usually, Register SIP Server configuration is the same as Proxy SIP Server. But if your VoIP service provider give different configurations between Register SIP Server

and Proxy SIP Server, you need make different settings).

Proxy Server Port	Set your Proxy SIP server port.
Proxy User	Input your Proxy SIP server account.
Proxy Password	Input your Proxy SIP server password.
Domain Realm	Set the sip domain if needed, otherwise this VoIP phone will use the Register server address as sip domain automatically. (Usually it is same with registered server and proxy server IP address).
Backup Server Address	Input the Backup Server Address, if the primary server is unavailable , then the phone will enable the Backup Server Address
Backup Server Port	Specify the Backup Server Port
Server Name	Named the server
Enable Registration	Start to register or not by selecting it or not.
Codecs Settings	
Disable Codecs/Enable Codecs	Use the navigation keys to highlight the desired one in the Enable/Disable Codecs list, and press the desired to move to the other list.
Advanced SIP Setting	
Forward Type	Select call forward mode, the default is Off
	Off: Close down calling forward
	Busy: If the phone is busy, incoming calls will be forwarded to the appointed phone.
	No answer: If there is no answer, incoming calls will be forwarded to the appointed phone after a specific.
Forward Number	Always: Incoming calls will be forwarded to the appoint phone immediately.
	The phone will prompt the incoming while doing forward.
	Specify the number you want to forward.
	Specify the No Answer Forward Delay Time, if the Forward Type is No answer, incoming calls will be forwarded after the no answer forward wait time
Transfer Timeout	For the phone supports the transfer of certain special features server, set interval time between sending “bye” and hanging up after the phone transfers a

	call.
Enable Hot Line	Specify Hot Line by selecting it
Hot Line Number	Specify Hot Line Number, the phone dial the hot line number automatically at hands-free mode or handset mode after warm line time
Warm Line Wait Time	Specify the Warm Line Time
BLF Server	the registered server will be gotten subscription package from ordinary application of BLF phone. please enter the BLFserver, when the sever dose not support subscription package. then the registered server and subscription server will be separate
SIP Encryption	Enable/Disable SIP Encryption.
SIP Encryption Key	Set the key for sip encryption.
RTP Encryption	Enable/Disable RTP encryption.
RTP Encryption Key	Set the key for RTP encryption.
Enable Auto Answer	Enable Auto Answer by selecting it
Auto Answer Timeout	Specify Auto Answer Time, the phone auto answers the incoming call after Auto Answer Time
Enable Session Timer	Set Enable/Disable Session Timer, whether support RFC4028.It will refresh the SIP sessions.
Session Timeout	Set the session timeout
Subscribe for MWI	Enable the Subscribe for MWI by selecting it, the phone will send subscribe message for MWI to the SIP Server
MWI Number	Specify the MWI Number; Please contact your system administrator for the connecting code. Different systems have different codes.
Subscribe Period(s)	Overtime of resending subscribe packet. Suggest using the default configuration.
Conference Type	Specify the Conference Type, if you select the local, you needn't input the conference number
Conference Number	Specify the network conference number, please contact your system administrator for the network conference number
Registration Expire(s)	Set expire time of SIP server register, default is 60 seconds. If the register time of the server requested is longer or shorter than the expired time set, the phone will change automatically the time into the time recommended by the server, and register again.
Enable Service Code	If you want to realize the following function by the server, please enter the On Code and Off Code option, then when you choose to enable/disable following function on your IP phone, it will send

message to the server, and the server will turn on/off the function immediately.

DND On Code	Set the DND On Code, When you press the DND hot key, the phone will send a message to the server, and the server will turn on the DND function. Then any calls to the extension will be rejected by the server automatically. And the incoming call record will not be displayed in the Call History.
DND Off Code	Set the DND Off Code, When you press the DND hot key, the phone will send a message to the server, and the server will turn off the DND function.
Always CFwd On Code	Set the Always CFwd On Code, when you choose to enable the always forward function on your phone, it will send message to the server, and the server will turn on the function immediately. When there are calls to the extension, the server will always forward it to the set number automatically. And the IP phone will not show the record in the call history anymore.
Always CFwd Off Code	Set the Always CFwd Off Code, when you choose to disable the always forward function on your phone, it will send message to the server, and the server will turn off the function immediately.
Busy CFwd On Code	Set the Busy CFwd On Code, when you choose to enable the busy forward function v on your phone, it will send message to the server, and the server will turn on the function immediately. When there are calls to the extension, the server will forward it to the set number automatically based the forward type. And the IP phone will not show the record in the call history anymore.
Busy CFwd Off Code	Set the Busy CFwd Off Code, when you choose to disable the busy forward function on your phone, it will send message to the server, and the server will turn off the function immediately.
No Answer CFwd On Code	Set the No Answer CFwd On Code, when you choose to enable the on answer forward function on your phone, it will send message to the server, and the server will turn on the function immediately. When there are calls to the extension, the server will forward it to the set number automatically based the forward type. And the IP phone will not show the record in the call history anymore.
No Answer CFwd Off Code	Set the No Answer CFwd Off Code, when you choose to disable the busy forward function on your

	phone, it will send message to the server, and the server will turn off the function immediately.
Ban Anonymous On Code	Set the Ban Anonymous On Code, When you choose to enable the ban anonymous call function on your IP phone, it will send information to the server, and the server will enable the ban anonymous call function for your IP phone automatically.
Ban Anonymous Off Code	Set the Ban Anonymous Off Code, When you choose to disable the ban anonymous call function on your IP phone, it will send information to the server, and the server will disable the ban anonymous call function for your IP phone automatically.
Keep Alive Type	Specify the keep alive type, if the type is option, the phone will send option sip message to server every NAT Keep Alive Period(s), then the server responses with 200 to keep alive. If the type is UDP, the phone will send UDP message to server to keep alive every NAT Keep Alive Period(s).
Keep Alive Interval	Set examining interval of the server, default is 60 seconds
User Agent	Set the user agent if have, the default is VoIP Phone 1.0
DTMF Type	Select DTMF sent mode, there are three modes: ● DTMF_RELAY ● DTMF_RFC2833 ● DTMF_SIP_INFO ● DTMF_AUTO Different VoIP Service providers may provide different modes.
DTMF SIP INFO Mode	There are two options: send 10/11 and send * / #
Ring Type	Set ring type of each line
Enable Via Rport	Enable/Disable system to support RFC3581. Via rport is special way to realize SIP NAT.
Enable PRACK	Enable or disable SIP PRACK function, suggest use the default config.
Enable Long Contact	Set more parameters in contact field; connection with SEM server
Convert URI	Convert # to %23 when send the URI.
Dial Without Registered	Set call out by proxy without registration;
Ban Anonymous Call	Set to ban Anonymous incoming Call;


Enable DNS SRV	Support DNS looking up with _sip. udp mode
Enable Missed Call Log	Enable the missed call log by it, the phone will save the missed call log into the call history record and display the missed calls on the idle screen, or won't save the missed call log into the call history record and display the missed calls on the idle screen.
Enable BLF List	Enable BLF List by selecting it, BLF list is a function which can monitor the group status, it is not one to one monitoring, but the information feedback from the sever to decide which BLF list will monitor
BLF List Number	Specify the BLF List Number
Respond 182 when Call waiting	when there is a call in call waiting, the phone will return 182 code
Server Type	Select the special type of server which is encrypted, or has some unique requirements or call flows.
RFC Protocol Edition	Select SIP protocol version to adapt for the SIP server which uses the same version as you select. For example, if the server is CISCO5300, you need to change to RFC2543; else phone may not cancel call normally. System uses RFC3261 as default.
Local Port	Set sip port of each line
RFC Protocol Edition	Set Anonymous call out safely; Support RFC3323and RFC3325;
Keep Authentication	Enable/Disable Keep Authentication System will take the last authentication field which is passed the authentication by server to the request packet. It will decrease the server's repeat authorization work, if it is enable.
Answer With A Single Codec	Enable/Disable the function when call is incoming, phone replies SIP message with just one codec which phone supports.
Auto TCP	Set to use automatically TCP protocol to guarantee usability of transport as message is above 1300 byte
Enable Strict Proxy	Support the special SIP server-when phone receives the packets sent from server, phone will use the source IP address, not the address in via field.
Enable GRUU	Set to support GRUU
Enable Display name Quote	Set to make quotation mark to display name as the phone sends out signal, in order to be compatible with server.
Enable user=phone	Enable user=phone by selecting it, it is contained in the invite sip message, in order to be compatible

	with server
Click to talk	Set click to Talk (need practical software support).
Transport Protocol	Set transport protocols, TCP or UDP or TLS;
Use VPN	Phone use vpn ip to communicate
Enable DND	When the type of DND feature is line, enable the DND feature for a line
SIP Global Settings	
Strict Branch	Enable the Strict Branch, the value of the branch must be in the beginning of z9hG4k in via field of the invite sip message received, or the phone won't response to the invite sip message. Notice: the deployment will become effective in all sip lines
Enable Group	Enable Group by selecting it, then the phone enable the sip group backup function Notice: the deployment will become effective in all sip lines
Registration Failure Retry Time	Specify the registration failure retry time, if the phone register failed, the phone will register again after registration failure retry time. Notice: the deployment will become effective in all sip lines.

8.3.3.2 Stun Config

In this web page, you can config SIP STUN.

STUN: By STUN server, the phone in private network could know the type of NAT and the NAT mapping IP and port of SIP. The phone might register itself to SIP server with global IP and port to realize the device both calling and being called in private network.

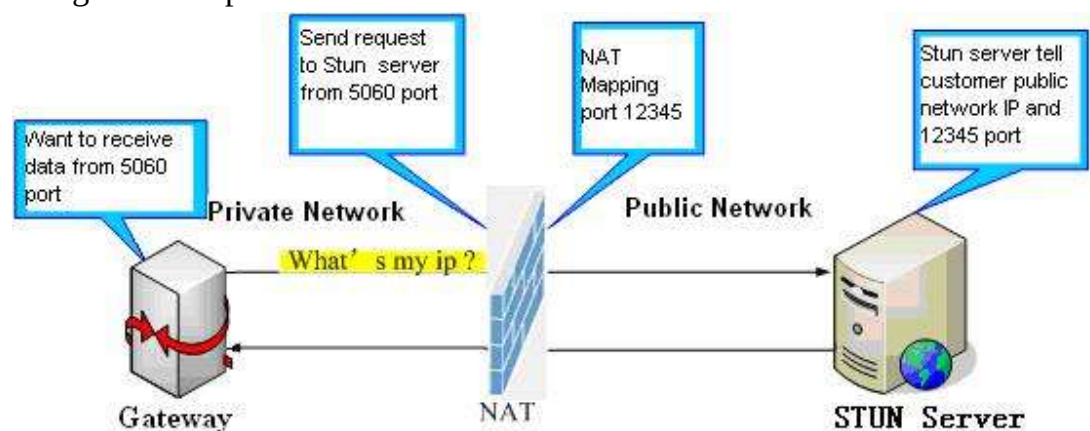

SIP

STUN

DIAL PEER

Simple Traversal of UDP through NATs (STUN) Settings

STUN NAT Traversal

FALSE

Server Address

Server Port

3478

Binding Period

50

second(s)

SIP Waiting Time

800

millisecond(s)

Local SIP Port

5060

Apply

SIP Line Using STUN

SIP 1

Use STUN

☐

Apply

STUN

Field name	explanation
Simple Traversal of UDP through NATs (STUN) Settings	
STUN NAT Traversal	Shows STUN NAT Transverse estimation, true means STUN can penetrate NAT, while False means not.
Server Address	Set your SIP STUN Server IP address
Server Port	Set your SIP STUN Server Port
Blinding Period	Set STUN blinding period(s). If NAT server finds that a NAT mapping is idle after time out, it will release the mapping and the system need send a STUN packet to keep the mapping effective and alive.
SIP Waiting Time	Specify the sip wait stun time; you can input the time depended on your network condition.
Local SIP Port	Configure the local SIP port, default port is 5060 (the port with immediate effect, after revision, SIP calls will use the modified port.
Sip Line Using STUN	

SIP Line Using STUN

SIP 1 ▼

Use STUN ☐

Apply

Choose line to set info about SIP, There are 6lines to choose. You can switch by **【Load】** button.

Use STUN Enable/Disable SIP STUN.

Notice: SIP STUN is used to realize SIP penetration to NAT. If your phone configures STUN Server IP and Port (default is 3478), and enable SIP Stun, you can use the ordinary SIP Server to realize penetration to NAT.

8.3.3.3 DIAL PEER

This functionality offers you more flexible dial rule, you can refer to the following content to know how to use this dial rule. When you want to dial an IP address, the entry of IP addresses is very cumbersome, but by this functionality, you can set number 156 to replace 192.168.1.119 here.

Dial Peer Table						
Number	Destination	Port	Mode	Alias	Suffix	Del Length
156	192.168.1.119	5060	SIP	no alias	no suffix	0

When you want to dial a long distance call to Beijing, you need dial an area code 010 before local phone number, but you can also dial number 1 instead of 010 after we make a setting according to this dial rule. For example, you want to dial 01062213123, but you need dial only 162213123 to realize your long distance call after you make this setting.

Dial Peer Table						
Number	Destination	Port	Mode	Alias	Suffix	Del Length
1T	0.0.0.0	5060	SIP	rep:010	no suffix	1

To save the memory and avoid abundant input of user, add the follow functions:

Dial Peer Table						
Number	Destination	Port	Mode	Alias	Suffix	Deleted Length
13[2-9]xxxxxxx	0.0.0.3	5060	SIP	add:0	no suffix	0
138xxxxxxx	0.0.0.3	5060	SIP	add:0	no suffix	0

1.* Match any single digit that is dialed.

If user makes the above configuration, after user dials 11 digit numbers started with 138, the phone will send out 0 plus the dialed numbers automatically.

0.0.0.3 means using sip3 to dial.

2. [] Specifies a range that will match digit. It may be a range, a list of ranges separated by commas, or a list of digits.

If user makes the above configuration, after user dials 11 digit numbers started with from 135 to 139, the phone will send out 0 plus the dialed numbers automatically.

Use this phone you can realize dialing out via different lines without switch in web interface.

Dial Peer Table

Number	Destination	Port	Mode	Alias	Suffix	Deleted Length
13[2-9]xxxxxxx	0.0.0.3	5060	SIP	add:0	no suffix	0
138xxxxxxx	0.0.0.3	5060	SIP	add:0	no suffix	0
156	192.168.1.24	5060	SIP	no alias	no suffix	0
1T	0.0.0.3	5060	SIP	rep:010	no suffix	1

Add Dial Peer

Phone Number

Destination(Optional)

Port(Optional)

Alias(Optional)

Call Mode

Suffix(Optional)

Deleted Length(Optional)

SIP

Apply

Dial Peer Option

13[2-9]xxxxxxx

Delete

Modify

DIAL PEER

Field name	explanation
Phone number	There are two types of matching conditions: one is full matching, the other is prefix matching. In the Full matching, you need input your desired phone number in this blank, and then you need dial the phone number to realize calling to what the phone number is mapped. In the prefix matching, you need input your desired prefix number and T; then dial the prefix and a phone number to realize calling to what your prefix number is mapped. The prefix number supports at most 30 digits.
Destination	Set Destination address. This is optional config item. If you want to set peer to peer call, please input destination IP address or domain name. If you want to use this dial rule on SIP2 line, you need input

	255.255.255.255 or 0.0.0.2 in it.SIP3 into 0.0.0.3
Port	Set the Signal port, the default is 5060 for SIP.
Alias	Set alias. This is optional config item. If you don't set Alias, it will show no alias.

Note: There are four types of aliases.




- 1) Add: xxx, it means that you need dial xxx in front of phone number, which will reduce dialing number length.
- 2) All: xxx, it means that xxx will replace some phone number.
- 3) Del: It means that phone will delete the number with length appointed.
- 4) Rep: It means that phone will replace the number with length and number appointed.

You can refer to the following examples of different alias application to know more how to use different aliases and this dial rule.

Call Mode	Select different signal protocol, SIP or IAX2
Suffix	Set suffix, this is optional config item. It will show no suffix if you don't set it.
Delete Length	Set delete length. This is optional config item. For example: if the delete length is 3, the phone will delete the first 3 digits then send out the rest digits. You can refer to examples of different alias application to know how to set delete length.

Examples of different alias application

Set by web	explanation	example
	You need set phone number, Destination, Alias and Delete Length. Phone number is XXXT; Destination is 255.255.255.255 (0.0.0.2) and Alias is del. This means any phone No. that starts with your set phone number will be sent via SIP2 line after the first several digits of your dialed phone number are deleted according to delete length.	If you dial "93333", the SIP2 server will receive "3333"

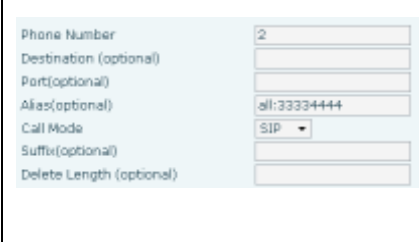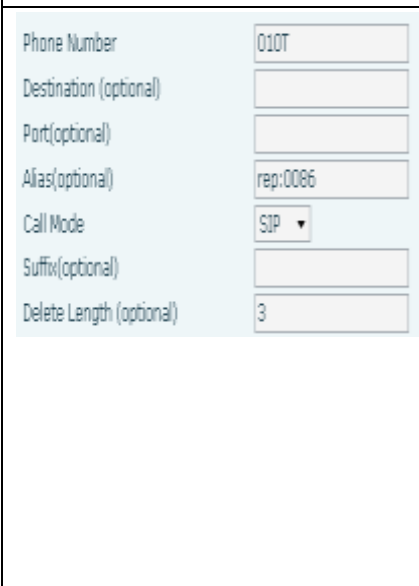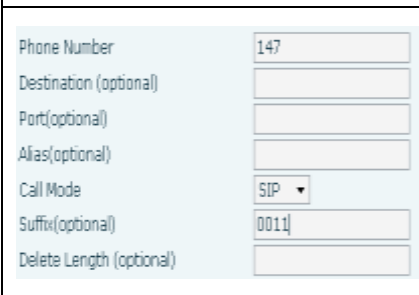	This setting will realize speed dial function, after you dialing the numeric key “2”, the number after all will be sent out.	When you dial “2”, the SIP1 server will receive 33334444
	The phone will automatically send out alias number adding your dialed number, if your dialed number starts with your set phone number.	When you dial “8309“, the SIP1 server will receive “07558309”
	You need set Phone Number, Alias and Delete Length. Phone number is XXXT and Alias is rep:xxx If your dialed phone number starts with your set phone number, the first digits same as your set phone number will be replaced by the alias number specified and New phone number will be send out.	When you dial “0106228”, the SIP1 server will receive “86106228”
	If your dialed phone number starts with your set phone number. The phone will send out your dialed phone number adding suffix number.	When you dial “147”, the SIP1 server will receive “1470011”

8.3.4 Phone

8.3.4.1 DSP Config

In this page, you can configure voice codec, input/output volume and so on.

AUDIO	FEATURE	DIAL PLAN	CONTACT	REMOTE CONTACT	WEB DIAL	MCAST	tone	ACTION URL
Audio Settings								
First Codec	G.711A	Second Codec	G.711U					
Third Codec	G.722	Fourth Codec	G.729AB					
Fifth Codec	AMR	Sixth Codec	G.722					
Seventh Codec	ILBC	Eighth Codec	AMR-WB					
Ninth Codec	G.726-32	Onhook Time	200	millisecond(s)				
Handset Volume	5 (1~9)	Default Ring Type	Type 1					
Speakerphone Volume	5 (1~9)	Headset Ring Volume	5 (1~9)					
Headset Volume	5 (1~9)	Speakerphone Ring Volume	5 (1~9)					
ILBC Payload Type	97 (96~127)	ILBC Payload Length	20ms					
AMR Payload Type	108 (96~127)	AMR-WB Payload Type	109 (96~127)					
G.729AB Payload Length	20ms	DTMF Payload Type	101 (96~127)					
G.723.1 Bit Rate	6.3kb/s	Enable VAD	☐					
Enable MWI Tone	☒							
Apply								

DSP Configuration

Field name	explanation
First Codec	The first preferential DSP codec:G.711A/U,G.722,G.723,G.729,G.726-32, ILBC,AMR,AMR-WB
Second Codec	The second preferential DSP codec: G.711A/U,G.722,G.723,G.729,G.726-32, ILBC,AMR,AMR-WB,NONE
Third Codec	The third preferential DSP codec: G.711A/U,G.722,G.723,G.729,G.726-32 , ILBC,AMR,AMR-WB,NONE
Fourth Codec	The forth preferential DSP codec: G.711A/U,G.722,G.723,G.729,G.726-32 , ILBC,AMR,AMR-WB,NONE
Fifth Codec	The fifth preferential DSP codec: G.711A/U,G.722,G.723,G.729,G.726-32, ILBC,AMR,AMR-WB,NONE
Sixth codec	The sixth preferential DSP codec: G.711A/U,G.722,G.723,G.729,G.726-32, ILBC,AMR,AMR-WB,NONE
Seventh Codec	The seventh preferential DSP codec: G.711A/U,G.722,G.723,G.729,G.726-32, ILBC,AMR,AMR-WB,NONE
Eighth Codec	The eighth preferential DSP codec: G.711A/U,G.722,G.723,G.729,G.726-32, ILBC,AMR,AMR-WB,NONE
Ninth Codec	The ninth preferential DSP codec: G.711A/U,G.722,G.723,G.729,G.726-32, ILBC,AMR,AMR-WB,NONE
Onhook Time	Specify the least reflection time of Hand down, the default is 200ms.

Default Ring Type	Select Ring Type
Handset Volume	Specify Handset Volume grade.
Speakerphone volume	Specify Speakerphone Volume grade.
Headset Volume	Specify Headset Volume grade.
Headset Ring Volume	Specify Headset Ring Volume grade
Speakerphone Ring Volume	Specify Speakerphone Ring Volume grade
ILBC Payload Type	Set ILBC payload type
ILBC Payload Length	Set ILBC Payload Length
AMR Payload Type	Set AMR payload type
AMR-WB Payload Type	Set AMR-WB payload type
G729AB Payload Length	Set G729 Payload Length
G723.1 Bit Rate	5.3kb/s or 6.3kb/s is available
DTMF Payload Type	Set DTMF Payload Type.
EnableVAD	Select it or not to enable or disable VAD. If enable VAD, G729 Payload length could not be set over 20ms.
Enable MWI Tone	the phone will play MWI tone when a new MWI comes

8.3.4.2 FEATURE

In this web page, you can configure Call Transfer, Call Waiting, 3 Ways Call, Black List, white list Limit List and so on.

AUDIO	FEATURE	DIAL PLAN	CONTACT	REMOTE CONTACT	WEB DIAL	MCAST	TONE	ACTION URL
Feature Settings								
DND (Do Not Disturb)	Disabled		Ban Outgoing	☐				
Enable Call Transfer	☒		Enable Call Waiting	☒				
Semi-Attended Transfer	☒		Enable 3-way Conference	☒				
Enable Auto Handdown	☒		Accept Any Call	☒				
Auto Handdown Time	3 second(s)		Enable Call Completion	☐				
Enable Auto Redial	☐		Enable Pre-Dial	☒				
Auto Redial Interval	10 (1~100)second(s)		Enable Silent Mode	☐				
Auto Redial Times	10 (1~100)		Hide DTMF	Disabled				
Auto Headset	☒		Ring From Headset	☐				
Enable Intercom	☒		Enable Intercom Mute	☐				
Enable Intercom Tone	☒		Enable Intercom Barge	☒				
P2P IP Prefix			DND Return Code	480(Temporarily Not Available)				
Turn Off Power Light	☒		Busy Return Code	486(Busy Here)				
Emergency Call Number	110		Reject Return Code	603(Decline)				
Enable Password Dial	☐		Active URI Limit IP					
Password Dial Prefix			Push XML Server					
Password Length	0 (0~31)		Enable Call Waiting Tone	☒				
Enable Call History	☒		Enable Multi Line	☒				
Enable Default Line	☒		Enable Auto Switch Line	☒				
Allow IP Call	☒		Play Talking DTMF Tone	☒				
Play Talking DTMF Tone	☒		Play Dialing DTMF Tone	☒				
Apply								
Block Out Settings								
Block Out Add Delete								

FEATURE

Field name	explanation
Do Not Disturb	There are three options: Disabled: The phone accepts any normal incoming call Phone: The phone rejects any incoming call, the caller will automatically prompt hang up, but outgoing calls will not be affected Line: A line enabled DND will reject its any incoming call
Ban Outgoing	If you select Ban Outgoing to enable it, and you cannot dial out any number.
Enable Call Transfer	Enable Call Transfer by selecting it.
Semi-Attended Transfer	Enable Semi-Attended Transfer by selecting it
Enable Auto Handdown	The phone will hang up and return to the idle automatically at hands-free mode
Auto Handdown Time	Specify Auto Hand down Time, the phone will hang up and return to the idle automatically after Auto Hand down Time at hands-free mode, and play dial tone Auto Hand down Time at handset mode
Enable Auto Redial	Enable Auto Redial by selecting it, then the phone reminds whether redial, when the callee is busy or rejects

Auto Redial interval	Specify the Auto Redial interval,
Auto Redial Times	Specify the Auto Redial interval
Auto Headset	Open this function, if there is a headphones in C60, you can press “ answer” key or line key to answer a call with the headset,
Enable Intercom	Enable Intercom Mode by selecting it
Enable Intercom Mute	Enable mute mode during the intercom call
Enable Intercom Tone	If the incoming call is intercom call, the phone plays the intercom tone
Enable Intercom Barge	Enable Intercom Barge by selecting it, the phone auto answers the intercom call during a call. If the current call is intercom call, the phone will reject the second intercom call
P2P IP Prefix	Set Prefix in peer to peer IP call. For example: what you want to dial is 192.168.1.119, If you define P2P IP Prefix as 192.168.1., you dial only #119 to reach 192.168.1.119. Default is “.”. If there is no “.” Set, it means to disable dialing IP.
Turn Off Power Light	Enable Turn Off Power Light by selecting it
Emergency Call Number	Specify the Emergency Call Number. Despite the keyboard is locked ,you can dial the emergency call number
Enable Password Dial	Enable Password Dial by selecting it, When number entered is beginning with the password prefix, the following N numbers after the password prefix will be hidden as *, N stand for the value which you enter in the Password Length field. For example: you set the password prefix is 3, enter the Password Length is 2, then you enter the number 34567, it will display 3**67 on the phone
Password Dial Prefix	Specify the prefix of the password call number
Password Length	Specify the Password length
Enable Call Waiting	Enable Call Waiting by selecting it. then the phone reminds whether redial, when the caller is busy or rejects . if it's ok and the phone finds out that the caller is idle by sip message, it will reminds whether redial
Enable 3-way Conference	Enable 3-way conference by selecting it

Accept Any Call	If select it, the phone will accept the call even if the called number is IP .
Enable Call Completion	Enable Call Completion by selecting it, If the callee is busy, the sip server will inspect the callee status at intervals. If the callee is idle, the server will send notify message to inform the caller whether redial.
Enable Pre-dial	Disable this feature, in standby interface next number, will realize the number rules "send out over the time";Enable the feature ,then the number will not be send out over the time.
Enable Silent Mode	Enable Silent Mode by selecting it, the phone light will red blink to remind that there is a missed call instead of playing ring tone
Hide DTMF	Specify the hide DTMF mode
Ring From Headset	Enable Ring From Handset by selecting it, the phone plays ring tone from handset
DND Return Code	Specify DND Return code
Busy Return Code	Specify Busy Return Code
Reject Return Code	Specify Reject Return Code
Active URI Limit IP	Specify the server IP that remote control phone for corresponding operation.
Push XML Server	Specify the Push XML Server, when phone receives request, it will determine whether to display corresponding content on the phone which sent by the specified server or not.
Enable Call Waiting Tone	Turn off this feature, you will not hear issued a " beep" sound with more calls
Enable Call History	You can see the phone call history
Enable Multi Line	Enable multi-line,10 road calls can be enabled, otherwise make at most two road calls
Enable Default Line	When enabled, a sip line becomes the default line; disabled, the phone will begin in accordance with the line from the SIP1 sequential search, select an available line for calls.
Enable Auto Switch Line	Prerequisite: Enable Default Line ON: If sip1 registration fails, it will automatically find the first available line down Off: If sip1 registration fails, does not automatically find the first available down the line, using the default line If default Line is disabled, automatic line switch function does not take effect
Allow IP	Enter the remote IP to make a call

Call

Play Talking DTMF Tone	Press the number keys in a call, you can hear the sound of the end
Play Dialing tone	Press the number keys in dialing, you can hear the sound of the end

Block Out Settings

Block out	Set Add/Delete Limit List. Please input the prefix of those phone numbers which you forbid the phone to dial out. For example, if you want to forbid those phones of 001 as prefix to be dialed out, you need input 001 in the blank of limit list, and then you cannot dial out any phone number whose prefix is 001. X and are wildcard x means matching any single digit. For example, 4xxx expresses any number with prefix 4 which length is 4 will be forbidden to dialed out means matching any arbitrary number digit. For example, 6 expresses any number with prefix 6 will be forbidden to dialed out.
-----------	---

Notice: Black List and Limit List can record at most 10 items respectively.

8.3.4.3 DIAL PLAN

This system supports 4 dial modes:

- 1) End with “#”: dial your desired number, and then press #.
- 2) Fixed Length: the phone will intersect the number according to your specified length.
- 3) Time Out: After you stop dialing and waiting time out, system will send the number collected.
- 4) Press # to Do Blind Transfer: input the number you want to transfer to then press “#” you can transfer the current call to the number.
- 5) Blind Transfer on OnHook : input the number you want to transfer to then hang up handle or press speaker, you can transfer the current call to the number.
- 6) Attend Transfer on OnHook: hang up handle or press speaker you can realize the blind transfer function.
- 7) Press DSS Key to Do Blind Transfer: press dss-key, the phone will transfer the current call to the third party
- 8) User defined: you can customize digital map rules to make dialing more flexible. It is realized by defining the prefix of phone number and number length of dialing.

In order to keep some users' secondary dialing manner when dialing the external line with PBX, phone can be added a special rule to realize it. so user can dial a number as external line prefix and get the secondary dial tone to keep dial the external number. After finishing dialing, phone will send the prefix and

external number totally to the server.

For example, there is a rule 9, xxxxxxxx in the digital map table. After dialing 9, phone will send the secondary dial tone, user may keep going dialing. After finished, phone will call the number which starts with 9; actually the number sent out is 9-digit with 9.

DIAL PLAN Configuration

Field name	explanation
Basic Setting	
Press "#" to Send	Set Enable/Disable the phone ended with “#” dial.
Dial Fixed Length	Specify the Fixed Length of phone ending with.
Send after (3-30) seconds	Set the timeout of the last dial digit. The call will be sent after timeout.
Press # to Do Blind Transfer	Enable Blind Transfer On Hook, when executing Blind Transfer End with #, press # after inputting the number that you want to transfer, the phone will transfer the current call to the third party
Blind Transfer on OnHook	Enable Blind Transfer on On Hook, when executing Blind Transfer, hang up after inputting the number that you want to transfer, the phone will transfer the current call to the third party
Attend Transfer on OnHook	Enable Attend Transfer on On Hook, when executing Attended Transfer, hang up after the third party answers, the phone will transfer the current call to the third party
Press DSS Key to Do Blind Transfer	Enable press DSS Key to Do Blind Transfer, when executing Blind Transfer, press dss-key, the phone will transfer the current call to the third party

Dial Plan Table

Plans:

Below is user-defined digital map rule:

[] Specifies a range that will match digit. May be a range, a list of ranges separated by commas, or a list of digits.

* Match any single digit that is dialed.

. Match any arbitrary number of digits including none.

Tn Indicates an additional time out period before digits are sent of n seconds in length. n is mandatory and can have a value of 0 to 9 seconds. Tn must be the last 2 characters of a dial plan. If Tn is not specified it is assumed to be T0 by default on all dial plans.

规则:
"[1-8]xxx"
"9xxxxxxx"
"911"
"99T4"
"9911x.T4"

Cause extensions 1000-8999 to be dialed immediately

Cause 8 digit numbers started with 9 to be dialed immediately

Cause 911 to be dialed immediately after it is entered.

Cause 99 to be dialed after 4 seconds.

Cause any number started with 9911 to be dialed 4 seconds after dialing ceases.

Notice: Dial plan can realised at speaker,pick handle or headset mode. End with “#”, Fixed Length, Time out and Digital Map Table can be used simultaneously, System will stop dialing and send number according to your set rules.

8.3.4.4 CONTACT

You can input the name, phone number and select ring type for each name here.

AUDIOFEATUREDIAL PLANCONTACTREMOTE CONTACTWEB DIALMCASTTONEACTION URL

Phonebook Table

Group All

Hangup

Index

Name

Office Number

Mobile Number

Other Number

Ring Type

Group

Page:

Pre

Next

friend

Add

Add to Blacklist

Deletes

Delete All

Add Contact

Name

Office Number

Mobile Number

Other Number

Group Setting

Unselected

friend

home

work

business

classmate

Add

Ring Type

Line

Line

Line

Selected

Modify

Default

Auto

Auto

Auto

Clear

Import Contact List

Select File:

Browse

(* .xml, * .vdf, * .csv)

Update

Export Contact List

Export XML

Export CSV

Export VCF

Group Option

Group

Name

Ring Type

Add

Modify

Delete

Delete All

friend

friend

Default

Blacklist Settings

Blacklist Item

4149

Delete

Delete All

Type

Value

Line

Add

Number

Auto

Blacklist

Version: 1.1.0.0

CONTACT

Field name

explanation

Phonebook Table

Index	Name	Office Num	Mobile Num	Other Num	Ring Type
Name	Shows the name corresponding to the phone number				
Number	Shows the phone number				
Ring Type	Shows the ring type of the incoming call.				
Group	Shows the group of the contact				

Notice: the maximum capability of the phonebook is 500 items, you can select many or a contact to add to group and add to blacklist, and delete many or a contact, and delete all contacts.

Add Contact List

Name	Specify the name corresponding to the phone number
Office Number	Specify the office number

Mobile Number	Specify the mobile number
Other Number	Specify the other number
Ring Type	Specify the ring type for the phone number
Line	Specify the sip line for the each number
Group setting	Select the group from the unselected group to selected list for the contact; you can select many groups for the contact.

Notice: the add button for adding a new contact, the modify button for modifying the added contact, the clear all button for clear all input information of the contact

Group Option

Group	Select the added groups, then modify or delete and so on
Name	Input the name of the group, then click the add button, you can add a new group.
Ring Type	Specify the ring type for the group as adding a new group

Import Contact List

Select File	Click the browse button to select the phonebook file that you want to import, than click update button, the phonebook file selected will be added to the phone.
-------------	---

Export Contact File

Export XML	Click export xml button to export phonebook file of xml model
Export CSV	Click export xml button to export phonebook file of csv model
Export VCF	Click export xml button to export phonebook file of vcf model

Blacklist Settings

Type	Select the blacklist type, you can select number or prefix of number
Value	Input number or prefix of number
Line	Select the sip line

Notice: the add button for adding a new blacklist, the delete button for deleting one item, the delete all button for deleting all items.

If user does not want to answer some phone calls, add these phone numbers to the Black List, and these calls will be rejected.x and are wildcard x means matching any single digit. for example, 4xxx expresses any number with prefix 4 which length is 4 will be forbidden to be responded.

DOT (.) means matching any arbitrary number digit. for example, 6. expresses any number with prefix 6 will be forbidden to be responded.

If user wants to allow a number or a series of number incoming, he may add the number(s) to the list as the white list rule. the configuration rule is -number, for example, -123456, or -1234xx

Blacklist
4149

Means any incoming number is forbidden except for 4119

Note: End with DOT (.) when set up the white list

8.3.4.5 REMOTE CONTACT

The screenshot shows a web interface with a top navigation bar containing tabs: AUDIO, FEATURE, DIAL PLAN, CONTACT, REMOTE CONTACT (selected), WEB DIAL, MCAST, TONE, and ACTION URL. Below the navigation bar, there are two main sections: 'Remote Phonebook Settings' and 'LDAP Settings'.

Remote Phonebook Settings: This section contains a table with 6 columns: Index, Phonebook Name, Server URL, SIP Line, User, and Password. There are 4 rows for indices 1 through 4. Each row has input fields for the first three columns and dropdown menus for the last three. Below the table is an 'Apply' button.

LDAP Settings: This section has a dropdown menu for 'LDAP' set to 'LDAP 1'. It contains two columns of settings:

- Left column: Display Title (11), Server Address (192.168.1.3), Authentication (None), Username (empty), Search Base (dc=winline,dc=com), Telephone (telephoneNumber), Other (home).
- Right column: Version (Version 3), Server Port (389), Line (AUTO), Password (empty), Enable Calling Search (checked), Mobile (mobile), Display Name (cn).

Below these settings is an 'Apply' button.

You need to match a XML Phonebook address and you can directly access to the corresponding remote phonebook on the phone.

Remote Phonebook Setting

Phonebook Name	Custom the phonebook name displayed on the phone
Server URL	Specify the server url of the remote phonebook
Sip Line	Specify the sip line for the remote phonebook
Authentication	Specify the authentication mode for remote phonebook
Username/password	Input the authentication username and password

(Note: remote book support the modes as HTTP ,FTP ,TFTP)

LDAP Settings

Display Title	LDAP phonebook name
---------------	---------------------

Version	LDAP version
Server Address	LDAP server address
Server port	LDAP server port
Authentication	There are four options: NONE, DIGEST-MD5, CRAM-MD5, Simple
Line	contacts call using the selected line
Username	Enter username
Password	Enter password
Search Base	query the root directory access to LDAP
Enable Calling Search	the phone search LDAP server in the outgoing / incoming call . If a contact is searched, its name will be displayed on the screen
Telephone	Contacts' telephone
Mobile	Contacts' mobile phone
Other	Contacts' other information
Display Name	Contacts' displayname

8.3.4.6 WEB DIAL

You can make a call through the WEB DIAL, enter the Dial Num then press Dial, if you want to finish the talk, press Hang-up.

8.3.4.7 MCAST

Index/Priority	Name	Host:port
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		

Use the multicast function to send notice to every member of the multicast is simple and easy. By setting the multicast key on your phone, you can send multicast RTP flow to the pre-configured multicast address. By listening multicast address is configured on the phone, listen and play the multicast address to send the RTP stream.

Send multicast setting

On the phone web page,function key-function key,set a function key, as shown

DSS Key 8	Multicast	239.1.1.1:1366	AUTO	G.711A	
-----------	-----------	----------------	------	--------	--

Value format IP:Port, the IP address of multicast is range from 224.0.0.0 to 239.255.255.255,port is greater than 1024

If multicast codec is G722, the LCD screen will displays "HD", which means the phone is sending high-definition voice stream

Operate steps:

- 1、 When the phone is idle, press multicast key

Multicast RTP stream is send to pre-configured multicast address (IP: Port). The phone which listens to multicast address in the local network can receive the RTP stream. Multicast functionkey LED lights yellow.

LCD screen displays the following:



- 2、 Press the hold softkey to hold the current multicast session
- 3、 Press the end softkey again or multicast functionkey, multicast session can be stopped

Notice: RTP stream is one side, that is from a sender to a receiver. when the phone initiates a multicast RTP session in a call,the current call is on hold.

Receive multicast setting

You can set up the phone monitoring 10 different multicast addresses to receive these multicast RTP stream.

You have two method to receive RTP stream of multicast that can be set up through the web page: Enable priorities of normal calls and Enable page

Priority:

Enable priorities of normal call by select it, if the incoming RTP stream priority of multicast lower than the priority of current for normal calls, the phone will ignore the RTP stream of multicast. If the incoming RTP stream priority of multicast higher than the priority of current for normal calls, the phone will receive the RTP stream of multicast, and hold the current call. Disabled priorities of normal call by select disable, the phone will ignore all local network RTP stream of multicast.

Options as follows:

1-10:the priority defined for normal calls,1 the highest level,10 the lowest level

Disabled: Ignore all RTP stream of multicast

Enable Page Priority

Page priority determines the phone how to handle the newly received multicast RTP stream when in a multicast session. Enabled page priority, the phone will automatically ignore the low priority multicast RTP stream and receive the high priority multicast RTP stream and hold the current multicast session; If not enabled, the phone will automatically ignore all incoming multicast RTP stream.

Web page is set as follows:

MCAST Settings

Priority ▼

Enable Page Priority ☐

Index/Priority	Name	Host:port
1	ss	239.1.1.1:1366
2	ee	239.1.1.1:1367

Now multicast ss has higher priority than multicast ee, the highest priority is for normal calls

Notice: When a multicast session begins, multicast sender and receiver will beep

8.3.4.8 TONE

AUDIO	FEATURE	DIAL PLAN	CONTACT	REMOTE CONTACT	WEB DIAL	MCAST	TONE	ACTION URL
Tone Settings								
Tone Standard		China						
Dial Tone		450/0						
Ring Back Tone		480/1000.0/4000						
Busy Tone		450/350.0/350						
Congestion Tone		450/700.0/700						
Call waiting Tone		450/400.0/8500						
Holding Tone								
Error Tone								
Stutter Tone								
Information Tone		450/400.0/40						
Dial Recall Tone								
Message Tone								
Howler Tone								
Number Unobtainable Tone		450/100.0/180,450/100.0/150,450/100.0/100,450/400.0/400						
Warning Tone								
Record Tone								
Auto Answer Tone								
Apply								

You can select the desired tone standard, also can customize the settings

8.3.4.9 Action URL

AUDIO	FEATURE	DIAL PLAN	CONTACT	REMOTE CONTACT	WEB DIAL	MCAST	PHONE	ACTION URL
Action URL Settings								
		Setup Completed						
		Registration Success						
		Registration Disabled						
		Registration Failed						
		Off Hook						
		On Hook						
		Incoming Call						
		Outgoing Call						
		Call Established						
		Call Terminated						
		DND Enabled						
		DND Disabled						
		Always Forward Enabled						
		Always Forward Disabled						
		Busy Forward Enabled						
		Busy Forward Disabled						
		No Ans. Forward Enabled						
		No Ans. Forward Disabled						
		Transfer Call						
		Blind Transfer Call						
		Attended Transfer Call						
		Hold						
		Resume						
		Mute						
		Unmute						
		Missed Call						
		IP Changed						
		Idle To Busy						
		Busy To Idle						
Apply								

Specify the Action URL that Record the operation of phone, send these corresponding information to server, url:http://InternalServer/FileName.xml?(Internal Server is server ip, FileName is name of xml that contains the action message)

8.3.5 Function Key

FUNCTION KEY

EXT KEY

SOFTKEY

Screen Configuration

Contrast

5 (1~9)

Enable Backlight

☒

Backlight Time

30

Apply

Line Key Settings

Line Key	Type	Value	Line	Subtype	Pickup Number
Line Key 1	Line		SIP1	None	
Line Key 2	Line		SIP2	None	
Line Key 3	Line		SIP3	None	
Line Key 4	Line		SIP4	None	

Apply

Function Key Settings

Key	Type	Value	Line	Subtype	Pickup Number
DSS Key 1	Key Event		AUTO	Release	
DSS Key 2	Key Event		AUTO	MWI	
DSS Key 3	Key Event		AUTO	Headset	
DSS Key 4	None		AUTO	None	
DSS Key 5	None		AUTO	None	
DSS Key 6	None		AUTO	None	
DSS Key 7	None		AUTO	None	
DSS Key 8	None		AUTO	None	

Apply

Programmable Key Settings

Key	Desktop	Dialer	Calling	Desktop Long Pressed
Up	History	Pre Line	Pre Call	Status
Down	Status	Next Line	Next Call	Not Set
Left	None	Not Set	Not Set	Not Set
Right	None	Not Set	Not Set	Speed Dial
OK	Menu	Not Set	Not Set	Not Set

Apply

8.3.5.1 Function Key

Field name	explanation
Contrast	Set contrast of screen
Enable Backlight	Set enable/disable backlight
Backlight Time	You don't operate the phone more than a backlight timeout setting, the backlight will turn off

automatically

Line Key Settings

Line: select Auto, SIP1, SIP2, SIP3, SIP4, or IAX2 in function key type. After you set it, you pick up handset or hands-free, press this function key, and then you can use the corresponding SIP line.

Function Key Settings

key	Show the function key's serial number
Type	Memory Key: settings can be stored in key storage for each number, the standby or off-hook, select the function keys on the keyboard can call this number. Line, set the dial mode (Auto, SIP1, SIP2, SIP3, SIP4, IAX2).Key Key Event functions, monitor state. DTMF: In the call, send DTMF URL: You can input remote book url
Value	Set the type parameter values.
Line	Choose which lines to use this feature.
Subtype	Select the function parameters Key Event and Memory Event.
Pickup Number	Please input the pickup number When SubType is BLF or presence

NOTICE:

- memory keys can be configured through the following:

Speed Dial function, through the configuration of the key corresponding to the number of ways as shown below.

DSS Key 1	Memory Key	4111	SIP1	Speed Dial
-----------	------------	------	------	------------

User can press the F1 key to allocate this number by line1 line.

Intercom function, you can press this key in standby to automatically answer the call and make each other.

DSS Key 1	Memory Key	4111	SIP1	Intercom
-----------	------------	------	------	----------

User can be configured in accordance with push to talk function the way: 4116 was the other number; Then press the standby button and make it automatically answer the call 4116.

- key can be configured through the following events:

For example:

DSS Key 1	Key Event		SIP1	DND
-----------	-----------	--	------	-----

8.3.5.2 EXT KEY

FUNCTION KEY

EXT KEY

SOFTKEY

Expansion Module Selection

Expansion Module 1


Load

Not Connected

Key	Type	Value	Line	Subtype	Pickup Number
F 1	None		SIP1	None	
F 2	None		SIP1	None	
F 3	None		SIP1	None	
F 4	None		SIP1	None	
F 5	None		SIP1	None	
F 6	None		SIP1	None	
F 7	None		SIP1	None	
F 8	None		SIP1	None	
F 9	None		SIP1	None	
F 10	None		SIP1	None	
F 11	None		SIP1	None	
F 12	None		SIP1	None	
F 13	None		SIP1	None	
F 14	None		SIP1	None	
F 15	None		SIP1	None	
F 16	None		SIP1	None	
F 17	None		SIP1	None	
F 18	None		SIP1	None	
F 19	None		SIP1	None	
F 20	None		SIP1	None	
F 21	None		SIP1	None	
F 22	None		SIP1	None	
F 23	None		SIP1	None	
F 24	None		SIP1	None	
F 25	None		SIP1	None	
F 26	None		SIP1	None	
F 27	None		SIP1	None	
F 28	None		SIP1	None	
F 29	None		SIP1	None	
F 30	None		SIP1	None	

EXT KEY has the same usage with the Function key. “In” port connects the phone, “Out” port connects the next one, if there is only, you don’t need for power supply, if there are more than one, you need supply 5V power for the first one, and use RJ-45 direct connector.

8.3.5.3 SOFTKEY

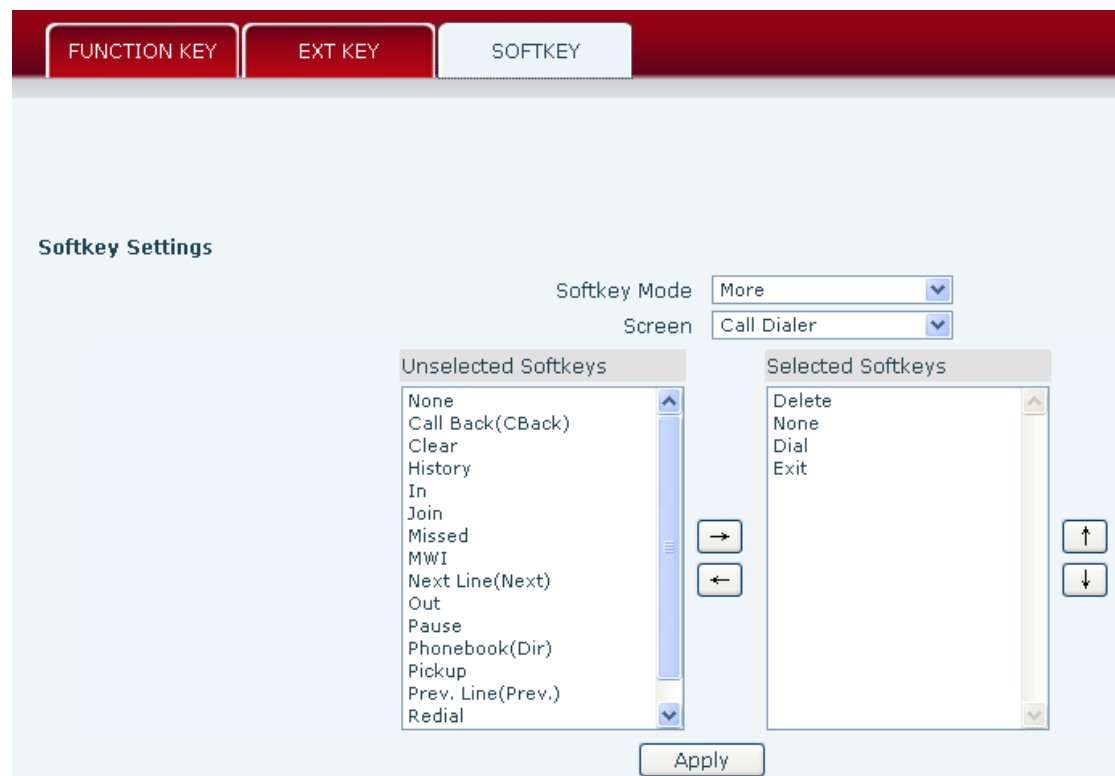


The interface shows a top navigation bar with three tabs: 'FUNCTION KEY', 'EXT KEY', and 'SOFTKEY'. The 'SOFTKEY' tab is selected. Below the tabs, the title 'Softkey Settings' is displayed. To the right of the title, there are two dropdown menus: 'Softkey Mode' set to 'More' and 'Screen' set to 'Call Dialer'. The main area contains two lists: 'Unselected Softkeys' and 'Selected Softkeys'. The 'Unselected Softkeys' list includes: None, Call Back(CBack), Clear, History, In, Join, Missed, MWI, Next Line(Next), Out, Pause, Phonebook(Dir), Pickup, Prev. Line(Prev.), and Redial. The 'Selected Softkeys' list includes: Delete, None, Dial, and Exit. Between the two lists are two buttons: a right-pointing arrow and a left-pointing arrow. To the right of the 'Selected Softkeys' list are two buttons: an up arrow and a down arrow. At the bottom center is an 'Apply' button.

You can configure different functions in different screens for every softkey.

8.3.6 Maintenance

8.3.6.1 Auto Provision

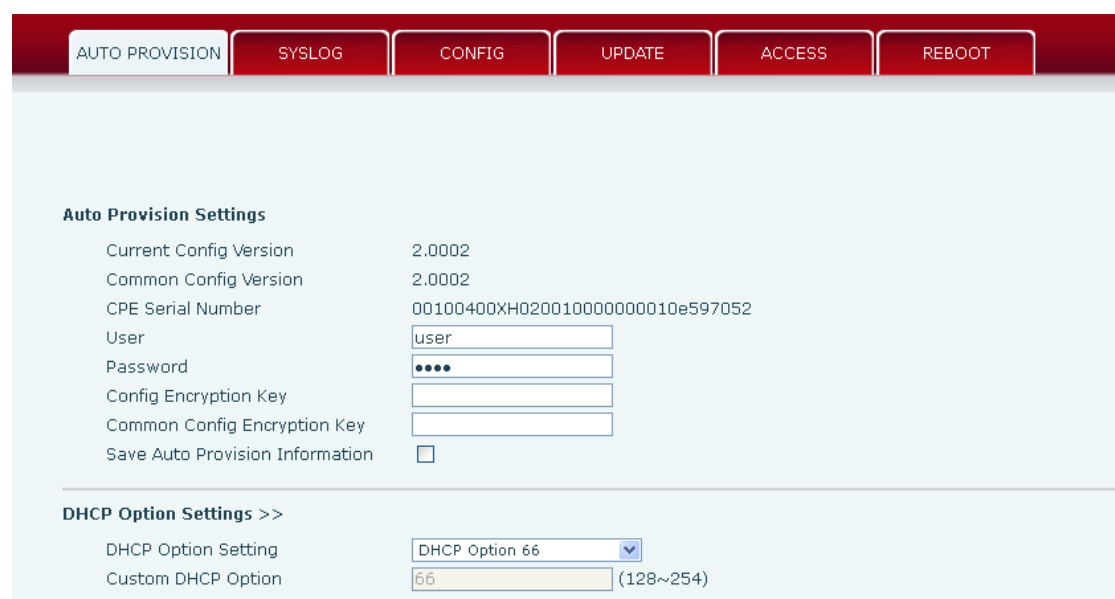

The interface shows a top navigation bar with six tabs: 'AUTO PROVISION', 'SYSLOG', 'CONFIG', 'UPDATE', 'ACCESS', and 'REBOOT'. The 'AUTO PROVISION' tab is selected. Below the tabs, the title 'Auto Provision Settings' is displayed. The settings are organized into two sections. The first section contains the following fields: 'Current Config Version' (2.0002), 'Common Config Version' (2.0002), 'CPE Serial Number' (00100400XH0200100000000010e597052), 'User' (user), 'Password' (masked with dots), 'Config Encryption Key' (empty), 'Common Config Encryption Key' (empty), and 'Save Auto Provision Information' (checkbox). The second section is titled 'DHCP Option Settings >>' and contains the following fields: 'DHCP Option Setting' (DHCP Option 66) and 'Custom DHCP Option' (66) with a range '(128~254)'.

Plug and Play >>

Enable PnP

☒

PnP Server

224.0.1.75

PnP Port

5060

PnP Transport

UDP

PnP Interval

1

hour(s)

Phone Flash Settings >>

Server Address

0.0.0.0

Config File Name

Protocol Type

FTP

Update Interval

1

hour(s)

Update Mode

Disabled

TR069 Settings >>

Enable TR069

☐

ACS Server Type

Common

ACS Server URL

0.0.0.0

ACS User

admin

ACS Password

•••••

TR069 Auto Login

☐

"Inform" Sending Period

3600

second(s)

Apply

Fanvil endpoint supports PnP and DHCP and Phone Flash to obtain the parameters. The PnP and DHCP and Phone Flash are all deployed, endpoint will go by the following process to try to obtain the server address and other parameters, when it boots up:

DHCP option → ☐ PnP server → ☐ Phone Flash

Auto Provision

Field name	explanation
Auto Update Setting	
Current Config Version	Show the current config file's version. If the version of the configuration downloaded is higher than the version of the running configurations, the auto provision would upgrade, or stop here. If the endpoints confirm the configuration by Digest method, the endpoints wouldn't upgrade configuration unless the configuration in the server is different with the running configuration.
Common Config Version	Show the common config file's version. If the configuration downloaded and the running configurations are the same, the auto provision would

stop here. If the endpoints confirm the configuration by Digest method, the endpoints wouldn't upgrade configuration unless the configuration in the server is different with the running configuration.

CPE Serial Number	Show CPE Serial Number
User	Specify FTP/HTTP/HTTPS server Username. System will use anonymous if username keep blank.
Password	Specify FTP/HTTP/HTTPS server Password.
Config Encrypt Key	Input the Encrypt Key, if the configuration file is encrypted.
Common Config Encrypt Key	Input the Common Encrypt Key, if the Common Configuration file is encrypted
Save Autoprovision Information	Save the username and password authentication message of http/https/ftp and input ID message in the phone until the URL in the server changes

DHCP Option Setting

DHCP Option Setting	Specify DHCP Option. DHCP option supports DHCP custom option and DHCP option 66 and DHCP option 43 to obtain the parameters. You could choose one method among them, the default is DHCP option disable.
Custom DHCP Option	A valid Custom DHCP Option is from 128 to 254. The Custom DHCP Option must be in accordance with the one defined in the DHCP server.

Plug and Play

Enable PnP	Enable PnP by selecting it, then the phone will send SIP SUBSCRIBE messages to a multicast address when it boots up. Any SIP server understanding that message will reply with a SIP NOTIFY message containing the Auto Provisioning Server URL where the phones can request their configuration.
PnP Server	Specify the PnP Server
PnP Port	Specify the PnP Server
PnP Transport	Specify the PnP Transfer protocol
PnP Interval	Specify the Interval time, unit is hour

Phone Flash

Server Address	Set FTP/TFTP/HTTP/HTTPS server IP address for auto update. The address can be IP address or Domain name with subdirectory.
Config File Name	Set configuration file's name which need to update. System will use MAC as config file name if config file

name keep blank. For example, 000102030405.。

Protocol Type	Specify the Protocol type FTP、TFTP or HTTP.
Update Interval	Specify update interval time, unit is hour.
Update Mode	Different update modes: 1. Disable: means no update 2. Update after reboot: means update after reboot. 3. Update at time interval: means periodic update.
TR069 Settings	
Enable TR069	Enable TR069 by selecting it
ACS Server Type	Specify the ACS Server Type
ACS Server URL	Specify the ACS Server URL
ACS User	Specify ACS User
ACS Password	Specify ACS Password
Periodix Interval	It will check every 6 minutes
TR069 Auto Login	Enable TR069 Auto Login by selecting it
"Inform" Sending Period	Specify the “inform” Sending Period, unit is second

8.3.6.2 Syslog Config

Syslog is a protocol which is used to record the log messages with client/server mechanism. Syslog server receives the messages from clients, and classifies them based on priority and type. Then these messages will be written into log by some rules which administrator can configure. This is a better way for log management.

8 levels in debug information:

Level 0---emergency: This is highest default debug info level. Your system cannot work.

Level 1---alert: Your system has deadly problem.

Level 2---critical: Your system has serious problem.

Level 3---error: The error will affect your system working.

Level 4---warning: There are some potential dangers. But your system can work.

Level 5---notice: Your system works well in special condition, but you need to check its working environment and parameter.

Level 6---info: the daily debugging info.

Level 7---debug: the lowest debug info Professional debugging info from R&D person.

At present, the lowest level of debug information is info; debug level only can be displayed on telnet.

AUTO PROVISION

SYSLOG

CONFIG

UPDATE

ACCESS

REBOOT

Syslog Settings

Server Address

0.0.0.0

Server Port

514

MGR Log Level

None

SIP Log Level

None

Enable Syslog

☐

Watch Dog

Enable Watch Dog

☒

Apply

Web Capture

Start

Stop

Port Mirror Setting

Port Mirror

☐

Apply

Syslog Configuration

Field name	explanation
Syslog Setting	
Server Address	Set Syslog server IP address.
Server Port	Set Syslog server port.
MGR Log Level	Set the level of MGR log.
SIP Log Level	Set the level of SIP log.
Enable Syslog	Select it or not to enable or disable syslog.
Watch Dog	
Enable Watch Dog	Phone will automatically restart in case of failure
Web Capture	
Start	Click the start button when you need capture the WAN packet stream of the phone, then open or save the file as the interface
Stop	Click the end button to stop capturing the packet stream
Port mirror Setting	When Port mirror Setting is enabled, device under the LAN port can obtain the data from WAN port

8.3.6.3 Config Setting

Save Configuration

Press the "Save" button to save the configuration files!

Backup Configuration

Save all network and VOIP settings.
Right Click here to Save as Config File(.txt)
Right Click here to Save as Config File(.xml)

Clear Configuration

Press the "Clear" button to Clear the configuration files!

Config Setting

Field name	explanation
Save Configuration	You can save all changes of configurations. Click the Save button, all changes of configuration will be saved, and be effective immediately.
Backup Configuration	Right clicks on "Right click here..." and select "Save Target As config File(.txt)" then you will save the config file in .txt format, or select "Save Target As config File(.xml)" then you will save the config file in .xml format
Clear Configuration	User can restore factory default configuration and reboot the phone. If you login as Admin, the phone will reset all configurations and restore factory default; if you login as Guest, the phone will reset all configurations except for VoIP accounts (SIP1-4 and IAX2) and version number.

8.3.6.4 Update

You can update your configuration with your config file in this web page.

AUTO PROVISION

SYSLOG

CONFIG

UPDATE

ACCESS

REBOOT

Web Update

Select File: (*.z,*.txt,*.xml,*.vcf,*.csv,*.wav)

TFTP/FTP Update

Server Address
 User
 Password
 File Name
 Type
 Protocol

Update Logo File

Select File:

Delete Logo File

Select File:

Logo File

Update

Field name	explanation
Web Update	
Web Update	Click the browse button, find out the config file saved before or provided by manufacturer, download it to the phone directly, press “Update” to save. You can also update downloaded update file, logo picture, ring, mmiset file by web.
FTP Update	
Server Address	Set the FTP/TFTP server address for download/upload. The address can be IP address or Domain name with subdirectory.
User	Set the FTP server Username for download/upload.
Password	Set the FTP server password for download/upload.
File name	Set the name of update file or config file. The default name is the MAC of the phone, such as 000102030405.
Notice: You can modify the exported config file. And you can also download config file which includes several modules that need to be imported. For example, you can download a config file just keep with SIP module. After reboot, other modules of system still use previous setting and are not lost.	
Action type that system want to execute:	
Type	1. Application update: download system update file 2. Config file export: Upload the config file to

FTP/TFTP server, name and save it.

3. Config file import: Download the config file to phone from FTP/TFTP server. The configuration will be effective after the phone is reset.

4. Phone book export (.vcf, .csv, .xml): Upload the phonebook file to FTP/TFTP server, name and save it.

5. PhoneBook import (.vcf, .csv, .xml): Download the phonebook file to phone from FTP/TFTP server.

Protocol	Select FTP/TFTP server
Update Logo File	
Select File	Specify the URL of the logo file
Delete Logo File	
Select File	Select the logo that you want to delete
Logo File	
Logo File	Show the logo file

8.3.6.5 ACCESS

You can add or delete user account, and change the authority of each user account in this web page.

AUTO PROVISION

SYSLOG

CONFIG

UPDATE

ACCESS

REBOOT

LCD Menu Password Settings

Menu Password

...

Apply

Keyboard Lock Settings

PIN to Lock

Keyboard Password

...

Enable Keyboard Lock

☐

Apply

User Settings

User	User Level
admin	Root
guest	General

Add User

User

Password

Confirm

User Level

Root

Apply

User Management

admin

Delete

Modify

Access Configuration


Field name	explanation
Keyboard Password	Set the password for entering the setting menu of the phone by the phone's key board. The password is digit.

User Settings	
User	User Level
admin	Root
guest	General

This table shows the current user existed.

User	Set account user name.
User Level	Set user level, Root user has the right to modify configuration, General can only read.
Password	Set the password.
Confirm	Confirm the password.
Select the account and click the Modify to modify the selected account, and click the Delete to delete the selected account.	
General user only can add the user whose level is General.	

8.3.6.6 Reboot

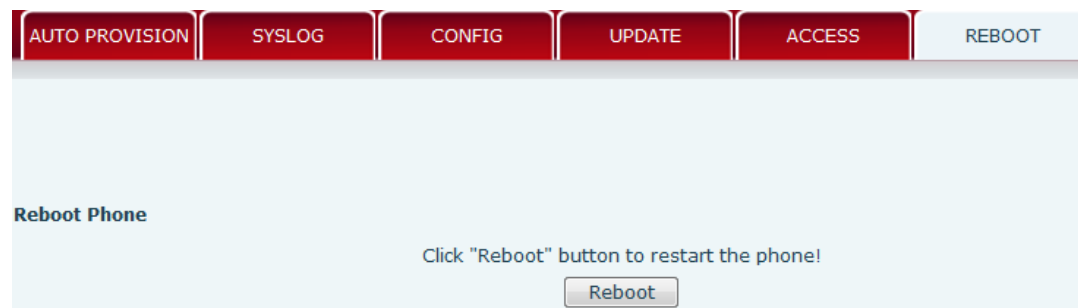


If you modified some configurations which need the phone's reboot to be effective, you need click the Reboot, then the phone will reboot immediately.

Notice: Before reboot, you need confirm that you have saved all configurations.

8.3.7 Security

8.3.7.1 WEB Filter

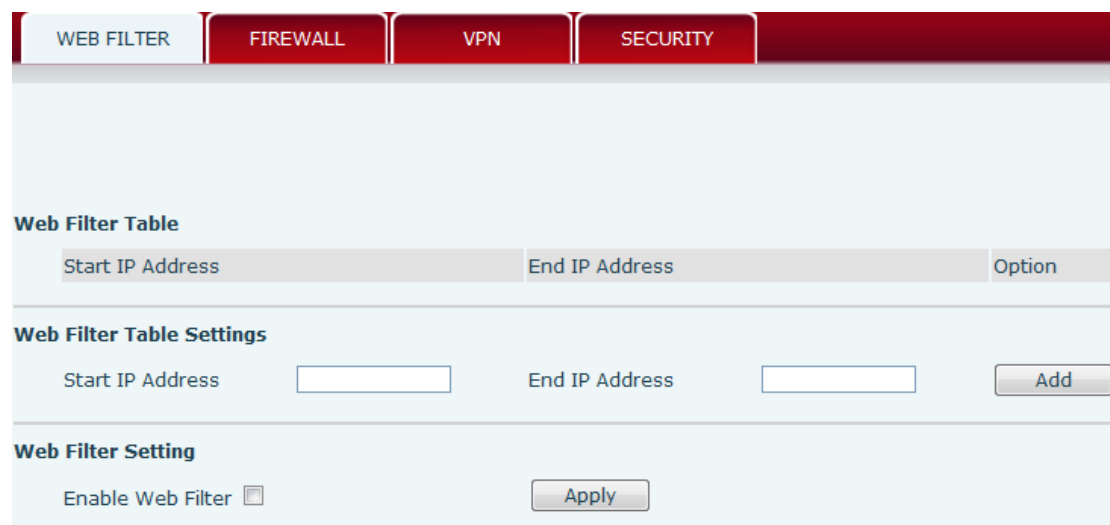

WEB Filter

User could make some device own IP, which is pre-specified, access to the MMI of the phone to config and manage the phone.

Field name	explanation
Web Filter Table Settings:	
Add or delete the IP address segments that access to the phone.	
Set initial IP address in the Start IP column, Set end IP address in the End IP column, and click Add to add this IP segment. You can also click Delete to	

delete the selected IP segment.

Web Filter setting Select it or not to enable or disable Web Filter. Click **Apply** to make it effective.

Notice: Do not set your visiting IP outside the Web filter range, otherwise, you cannot logon through the web.

8.3.7.2 Firewall

Firewall Type

Enable Input Rules ☐ Enable Output Rules ☐ **Apply**

Firewall Input Rule Table

Index	Deny/Permit	Protocol	Src Address	Src Mask	Src Port Range	Dst Addr	Dst Mask	Dst Port Range
-------	-------------	----------	-------------	----------	----------------	----------	----------	----------------

Firewall Output Rule Table

Index	Deny/Permit	Protocol	Src Addr	Src Mask	Src Port Range	Dst Addr	Dst Mask	Dst Port Range
-------	-------------	----------	----------	----------	----------------	----------	----------	----------------

Firewall Settings

Input/Output: Src Addr: Dst Addr:
Deny/Permit: Src Mask: Dst Mask: **Add**
Protocol: Src Port Range: - Des Port Range: -

Rule Delete Option

Input/Output: Index To Be Deleted: **Delete**

Firewall Configuration

In this web interface, you can set up firewall to prevent unauthorized Internet users from accessing private networks connected to the Internet (input rule), or prevent unauthorized private network devices from accessing the Internet (output rule).

Firewall supports two types of rules: input access rule and output access rule. Each type supports at most 10 items.

Through this web page, you could set up and enable/disable firewall with input/output rules. System could prevent unauthorized access, or access other networks set in rules for security. Firewall, is also called access list, is a simple implementation of a Cisco-like access list (firewall). It supports two access lists: one for filtering input packets, and the other for filtering output packets. Each kind of list could be added 10 items.

We will give you an instance for your reference.

Field name	explanation
Enable Input Rules	Select it to Enable Input Rules
Enable Output Rules	Select it to Enable Output Rules
Input / Output	Specify current adding rule by selecting input rule or output rule.
Deny/Permit	Specify current adding rule by selecting Deny rule or Permit rule.
Protocol	Filter protocol type. You can select TCP, UDP, ICMP, or IP.
Port Range	Set the filter Port range
Src Address	Set source address. It can be single IP address, network address, complete address 0.0.0.0, or network address similar to *.*.*.0
Des Address	Set the destination address. It can be IP address, network address, complete address 0.0.0.0, or network address similar to *.*.*.*
Src Mask	Set the source address' mask. For example, 255.255.255.255 means just point to one host; 255.255.255.0 means point to a network which network ID is C type.
Dest Mask	Set the destination address' mask. For example, 255.255.255.255 means just point to one host; 255.255.255.0 means point to a network which network ID is C type.

Click the **Add** button if you want to add a new output rule.

Then enable out access, and click the Apply button.

So when devices execute to ping 192.168.1.118, system will deny the request to send icmp request to 192.168.1.118 for the out access rule. But if devices ping other devices which network ID is 192.168.1.0, it will be normal.

Click the **Delete** button to delete the selected rule.

Click the **Add** button if you want to add a new output rule.

Then enable out access, and click the Apply button.


So when devices execute to ping 192.168.1.118, system will deny the request to send icmp request to 192.168.1.118 for the out access rule. But if devices ping other devices which network ID is 192.168.1.0, it will be normal.

Click the **Delete** button to delete the selected rule.

8.3.7.3 VPN

This web page provides us a safe connect mode by which we can make remote access to enterprise inner network from public network. That is to say, you can

set it to connect public networks in different areas into inner network via a special tunnel.

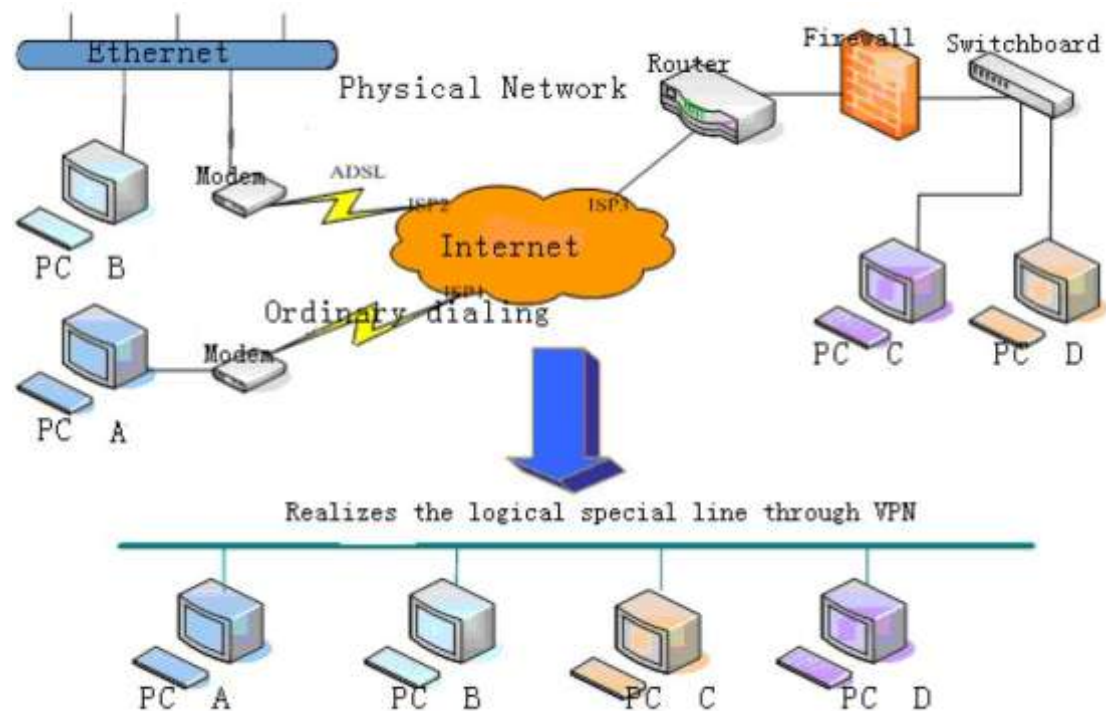

WEB FILTER	FIREWALL	VPN	SECURITY
Virtual Private Network (VPN) Status			
IP Address		0.0.0.0	
VPN Mode			
Enable VPN ☐			
L2TP ☐		OpenVPN ☒	
Layer 2 Tunneling Protocol (L2TP)			
VPN Server Address		VPN User	
VPN Password			
Apply			

VPN Configuration

Field name	explanation
VPN IP	Shows the current VPN IP address
Select L2TP. You can choose only one for current state. After you select it, you'd better save configuration and reboot your phone.	
Enable VPN	Select it or not to enable or disable VPN;

VPN Server Addr	Set VPN L2TP Server IP address
VPN User Name	Set User Name access to VPN L2TP Server
VPN Password	Set Password access to VPN L2TP Server

8.3.7.4 Security

Security

Field name	explanation
Update Security File	
Select Security File	Select the security file you want to update, then click Update button to update
Delete Security File	
Select Security File	Select the security file you want to delete, then click Delete button to update
SIP TLS File	Show SIP TLS authentication certification file
HTTPS File	Show HTTPS authentication certification file
Open VPN Files	Show Open VPN File authentication certification file

8.3.8 Logout

Click **Logout**, and you will exit web page. If you want to enter it next time, you need input user name and password again.

9 Appendix

9.1 Specification

9.1.1 Hardware

Item		C66(P)
Adapter (Input / Output)		Input: 100-240V Output: 5V 1A
port	WAN	10/100/1000 Base- T RJ-45 1 PORT
	LAN	10/100/1000 Base- T RJ-45 1 PORT
	EXT	RJ45 1 PORT
	headset	RJ9 1 PORT
Power Consumption		Idle: 2.5W/Active: 2.8W
LCD Size		128x64 53.5 x 70mm
Operation Temperature		0~40°C
Relative Humidity		10~65%
CPU		Broadcom
SDRAM		128MB
Flash		64MB
Dimension(L x W x H)		295×295×175mm
Weight		1.5kg

9.1.2 Voice features

- SIP supports 6 SIP servers
- Support SIP 2.0 (RFC3261) and correlative RFCs
- Codec: G.711A/u, G.723, G.729, G.722.1, G.726-32, ILBC, AMR, AMR-WB
- Echo cancellation: G.168 Compliance in LEC, additional acoustic echo cancellation(AEC) can reach 96ms max filter length in hands-free mode
- Support Voice Gain Setting, VAD, CNG
- Support full duplex hands-free

- Support multi line/HD Voice
- SIP support SIP domain, SIP authentication(none basic, MD5), DNS name of server, Peer to Peer/ IP call
- Automatically select calling line, if one line can't be connected, the phone can automatically switch to other line to call.
- 9 kinds of ring types and 3 user-defined music rings
- DTMF Relay: support SIP info, DTMF Relay, RFC2833
- SIP application: SIP Call forward/transfer (blind/attended) /hold/waiting/3 way talking/SMS/pickup /join call /redial /unredial/multi line/intercom/BLF/presence/push to talk/auto redial/call return
- Call control features: Flexible dial map, hotline, empty calling No. reject service, black list for reject authenticated call, white list, limit call, no disturb, caller ID, CLIR(reject the anonymous call), CLIP(make a call with anonymous), Dial without register.
- Support phonebook 500 records, Incoming calls / outgoing calls / missed calls. Each supports 100 records.
- 6 line keys defined as multi line with screen display or used as SIP line keys
- 8 DSS keys
- Soft keys programmable, function keys programmable
- Code synchronization via IP PBX/IMS
- Support EXT DSS consoles with 5 max
- Support click to dial via web phone book
- Voice codec setting for each SIP line
- Support keypad lock, and emergency call during the keypad lock
- Customized lcd logo
- Ring play via headset or speaker setting
- Signal tone parameters customized
- Phonebook supports vcard standard
- 12/24 hours time display
- Support daylight saving time
- Support path, group
- Support SIP Privacy
- Support SMS
- Support WMI
- Support Speed dial
- Support XML

9.1.3 Network features



- WAN: support bridge model
- Support PPPoE for xDSL
- Support VLAN (optional: voice vlan/ data vlan)

- Support VPN (L2TP) function
- Wan Port supports main DNS and secondary DNS server, can select dynamically to get DNS in DHCP mode or statically set DNS address.
- Support DHCP client on WAN
- Support DHCP server on LAN
- QoS with DiffServ
- Network tools in telnet server: including ping, trace route, telnet client

9.1.4 Maintenance and management

- Upgrade firmware through POST mode
- Web ,telnet and keypad management
- Management with different account right
- LCD and WEB configuration can be modified into requested language, and support multi-language dynamically shifted
- Upgrade firmware through HTTP,HTTPS FTP or TFTP Telnet remote management/ upload/download setting file
- Support Syslog
- Support Auto Provisioning (upgrade firmware or configuration file)

9.2 Digit-character map table

Keypad	Character	Keypad	Character
	1 @		7 P Q R S p q r s
	2 A B C a b c		8 T U V t u v
	3 D E F d e f		9 W X Y Z w x y z
	4 G H I g h i		*./
	5 J K L j k l		0
	6 M N O m n o		#/=